



THINKING PRECAST?  
THINK FP MCCANN



# PRECAST WALLING SOLUTIONS

v.6.3





# PRECAST WALLING SOLUTIONS

FP McCann offers an industry leading range of standard and bespoke, retaining and containing walling solutions. From supply only to fully designed and fitted schemes, FP McCann can offer a full service. With over 90 years' of combined experience at our Lydney, Grantham and Uddingston plants, we are able to deliver high quality precast concrete products at competitive market rates.

## THE CONCRETE FORCE

The Concrete Force defines our relentless drive to continually improve on our own expectations while exceeding yours, ensuring we add value to your project.

## CONCRETE COMMITMENT

FP McCann is committed to delivering more efficient, cost-effective and safety-focused sustainable concrete solutions. Our vision is to continue to exceed our customers' expectations whilst making an impact on new customers.

## CONCRETE RELATIONSHIPS

We believe in working with you as a partner from the start, which means offering our expertise in designing and manufacturing precast concrete to suit your individual project requirements.

## CONCRETE QUALITY

Through our factories based in Grantham (Lincolnshire), Lydney (Gloucestershire), Glasgow (Lanarkshire) and Magherafelt (Northern Ireland) FP McCann has got your project covered across the entire UK.

## CONTENTS

L Walls	6
Bed Walls	14
Bed Walls with Brick Slips	22
L Walls 4m-6m Units	24
WallCast	26
Prestressed Horizontal Panels	28
Prestressed Vertical Cantilever Panels	30
Rocket Walls™	32
Fire Walls	34
Andacrib Concrete Crib Retaining Walls	35
Easi-Bloc™	36
Concrete Safety Barriers	37
Case Studies	38



# OUR COMPANY

FP McCann is the UK's largest manufacturer and supplier of precast concrete solutions. We are committed to high quality, cost-effective and sustainable solutions tailored to meet clients' requirements.

From our thirteen UK manufacturing facilities, FP McCann offers solutions that include architectural and structural solutions, rooms, flooring, fencing, walling, shafts, tunnels, drainage, rail, power and agricultural products. FP McCann has worked on a large range of Design for Manufacture and Assembly (DfMA) projects across the UK. Our in-house Digital Engineering capability has grown in line with government and client expectations.

## OUR COMPREHENSIVE PRECAST CONCRETE BUSINESS EXTENDS TO INCLUDE:

**AGRICULTURE | BOX CULVERTS | BUILDING PRODUCTS | CONCRETE ROOF TILES  
DOCK LEVELLER PITS | DRAINAGE | FENCING | FILTER BED SYSTEMS  
FLOORING | POWER & INFRASTRUCTURE | PRECAST OFF-SITE BUILDING SOLUTIONS  
RAIL | SPECIALIST PRECAST | TANKS & CHAMBERS | TUNNELS & SHAFTS | WALLING**


Modern manufacturing plants at Alnwick (Northumberland), Armagh (Northern Ireland), Byley (Cheshire), Cadeby (Leicestershire), Ellistown (Leicestershire), Grantham (Lincolnshire), Lisnaskea (Northern Ireland), Littleport (Cambridgeshire), Lydney (Gloucestershire), Magherafelt (Northern Ireland), Uddingston (Lanarkshire) and Weston Underwood (Derbyshire) incorporate the latest computerised batching, distribution, casting, curing and handling systems and are operated by skilled and experienced workforces to ensure consistency of quality. Their geographical spread gives us an unrivalled ability to serve the construction industry throughout the UK and Ireland.

By applying the DFMA principles, FP McCann's design engineers are able to evaluate individual precast concrete products part by part, in addition to documenting the assembly process step by step. This allows them to generate the cost, part count and assembly time to provide a benchmark to measure its success and identify the parts and process improvement opportunities. In turn, this has allowed FP McCann to design and manufacture more cost-effective and efficient high-quality precast concrete products with less wastage and greater on-site recycling. As a result, increased productivity, combined with a reduction in production time and costs, allows FP McCann to be more competitive within the marketplace.

# OUR COMPANY

## KEY

- ◆ Walling Facilities
- Other Manufacturing Facilities
- ▲ Quarries / Manufacturing Locations

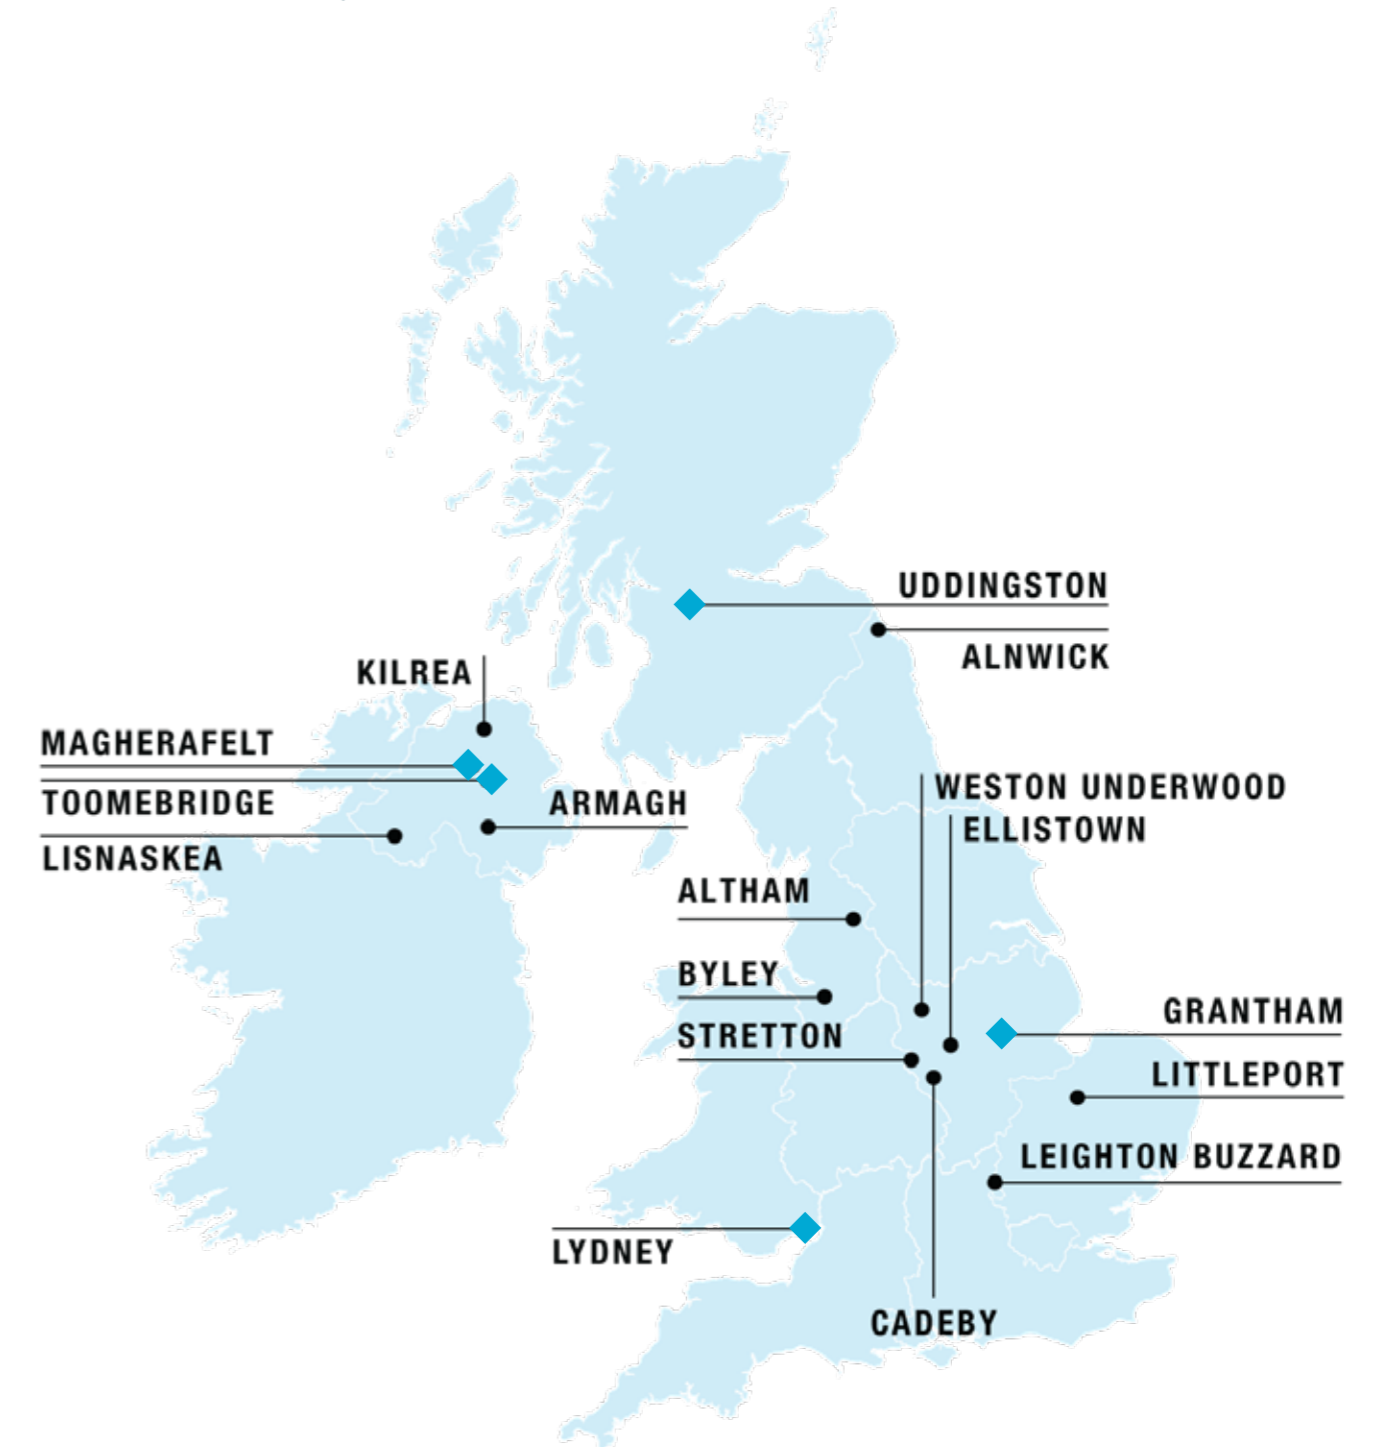

# L WALLS

FP McCann's precast L Wall units are ideal for forming both retaining and containing structures in residential, commercial, industrial and waste developments.

## PRODUCT FEATURES

- L Wall units are an ideal product where speed of installation is necessary
- They offer a fast, cost-effective solution to constructing retaining and containing developments
- Standard sizes range from 1m high up to 3.75m high, with a width of 1m for all units.

## PRODUCT BENEFITS

- Large range of sizes available
- Quick and easy installation, 25 11m per day <2.0m
- Create storage bays without imposing a load to the building frame
- No specialist trades required
- Can be loaded either side or both sides of the stem
- Retain material up to 19kN/m<sup>3</sup> and AoR 20° or a 20kN/m<sup>2</sup> surcharge
- Stability
- 90° corner and 22.5° mitred units available
- No heel – sheer reverse face (GB only)
- Available with heel feature to reverse (NI only)

## PRODUCT APPLICATIONS

- Storage facilities
- Division walls
- General soil retention
- Waste recycling bunkers
- Making up levels within buildings
- Bunker walls
- Retaining walls



L Wall no heel sheer reverse face (GB only)



L Wall with heel feature (NI only)

## BRICK CLAD FINISH



## TIMBER CLAD FINISH

The addition of timber cladding to the concrete L Wall units provides a more aesthetically pleasing finish and the simple method of attaching timber battens and feather lap boards means that coverage is a quick and easy process. The timber cladding is easy to maintain and the precast reinforced L Walls are a long-lasting no maintenance backing wall.

The precast concrete L Wall units are available in heights from 1.0 metre to 6.0 metres.



TIMBER CLAD L WALL SYSTEM FOR BARRATT HOMES

# L WALLS - STRAIGHT UNITS

## STANDARD SIZES

Designed for retained material with a density of 18 kN/m<sup>3</sup> (approximate bulk density of 1835 kg/m<sup>3</sup>)

Height (mm)	Width (mm) straight unit	Weight (kg) straight unit	Width (mm) corner unit	Weight corner unit (kg)
1000	1000	440	1000 X 1000	790
1500	1000	710	1000 X 1000	1170
1750	1000	870	1000 X 1000	1390
2000	1000	1010	1000 X 1000	1580
2500	1000	1500	1250 X 1250	2950
3000	1000	1960	1500 x 1500 (2 Piece)	2350
3750	1000	2950	2310 x 2310 (4 Piece)	2780

(Include 5% lifting allowance)

## ANCHORS FOR STANDARD CONDITIONS

Unit Height (mm)	Minimum Embedment		Anchor		
	Foundation (mm)	Unit (mm)	No.	Type	Length (mm)
1000	177	99	2	M20 Screwbolt	300
1500	169	107	2	M20 Screwbolt	300
1750	164	112	2	M20 Screwbolt	300
2000	161	115	2	M20 Screwbolt	300
2500	116/145	159/130	4	M20 Screwbolt	300
3000	206/227	174/149	4	M20 Screwbolt	400
3750	150/193	226/182	6	M20 Screwbolt	400

## HANDLING AND INSTALLATION



Units are delivered laid down on their edge and are fitted with 2 no. recessed lifting anchors. Quick release loops (1) and erection shackles (2, 3 & 4) are available for purchase and can be used in conjunction with customer's plant to offload and erect.

**Conformity with current lifting legislation and vehicle off-loading is the customer's responsibility.**



LH & RH 22.5° Mitred Toe Units available in 1.0 – 3.75m heights



# L WALLS - OFFLOADING INSTRUCTIONS

Off-loading must be carried out using appropriate certified lifting equipment, chains of the correct length for the angle of lift and the correct lifting devices for the cast in lifters.

Retaining Walls are supplied with 2 lifting anchors cast in the side of the unit. Deha Clutches are attached to these anchors and standard 2 legged chains (or an approved lifting beam) must be used to lift and transport the units on site. The minimum angle between each chain and the horizontal surface of the Retaining Wall is 60°.

## CORRECT ANGLE



## INCORRECT ANGLE



## INCORRECT ANGLE



# L WALLS - INSTALLATION STEPS

## INSTALLATION STEPS:


1. Position the units on the shimmed concrete foundation.
2. Dry pack mortar to the edge of the base of the units to create a seal to the perimeter.
3. Drill pilot hole embedment depth + additional 60-70mm (to allow for dust collection) into foundation through slotted hole.
4. Remove collected dust from drilled hole by easing the drill bit up and down within the hole.
5. Using an impact wrench set to slow-start install Fixing with washer.
6. Void in precast toe to be fully filled with FP McCann High Performance Grout.

## FOUNDATIONS


The foundation requirements should be determined by a qualified engineer. Units placed on a concrete foundation should be bedded on mortar and wedged to attain correct alignment, FP McCann recommends that L wall units are suitably anchored to the foundation.



# L WALLS - STRAIGHT UNITS

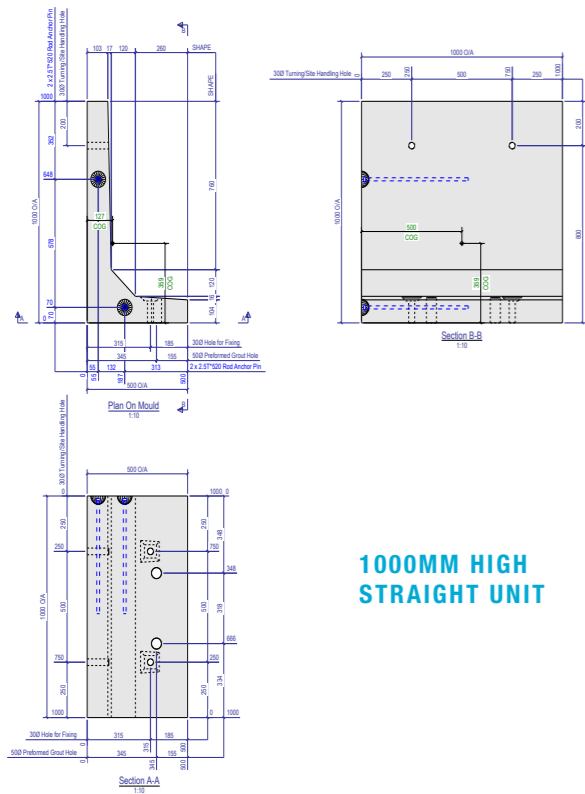


**1000MM HIGH STRAIGHT UNIT**

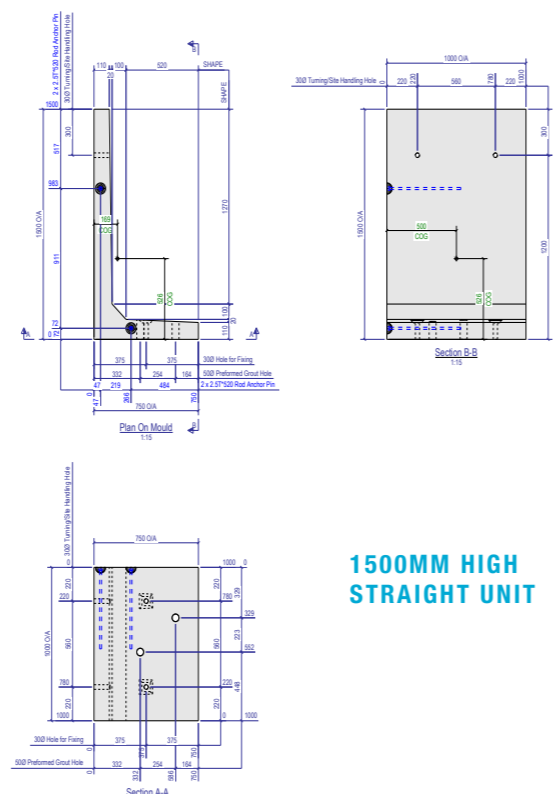


**1500MM HIGH STRAIGHT UNIT**


# L WALLS - STRAIGHT/CORNER UNITS

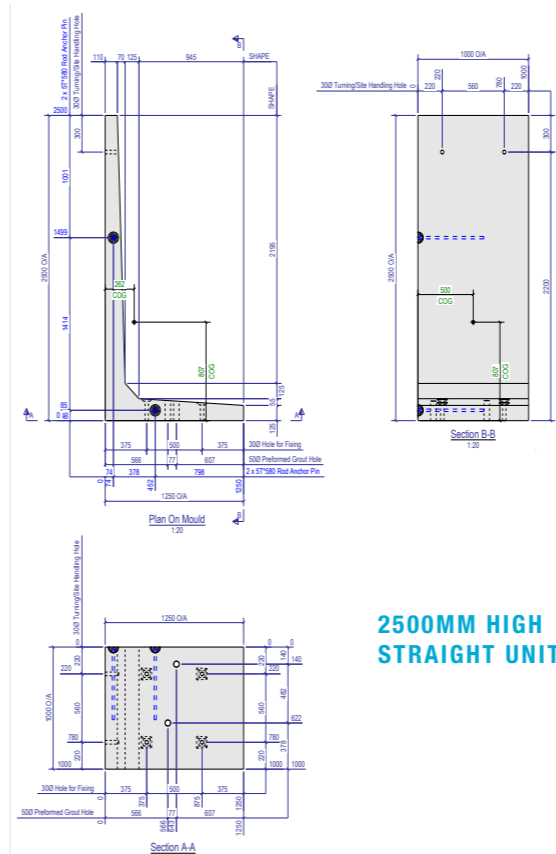


**2500MM HIGH STRAIGHT UNIT**

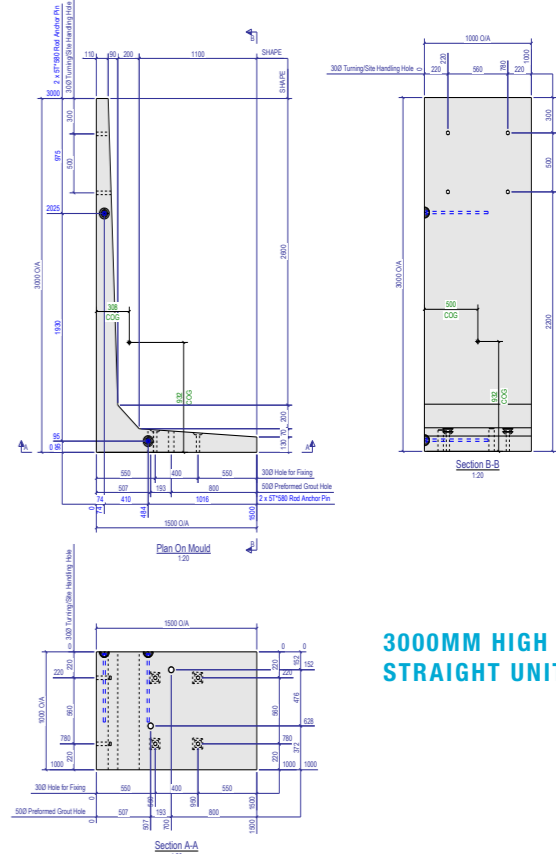


**3000MM HIGH STRAIGHT UNIT**

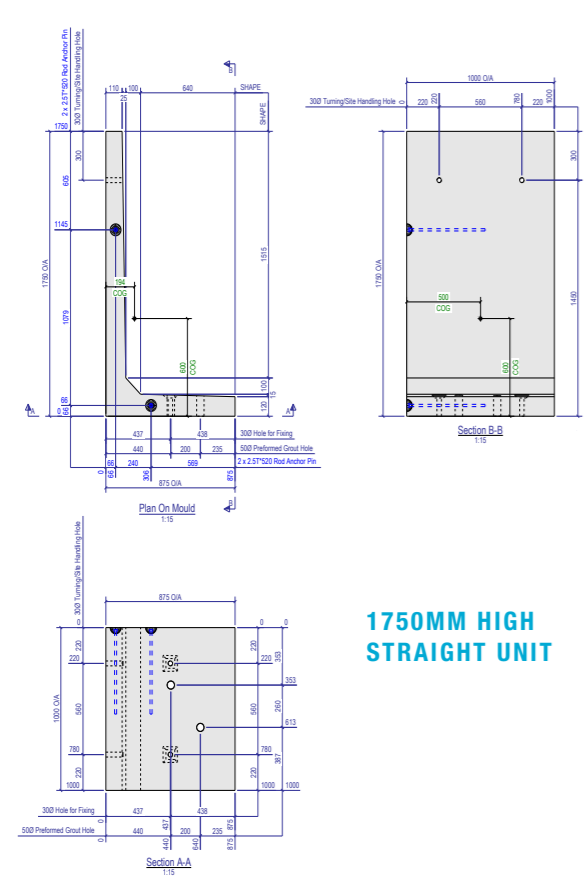


**1750MM HIGH STRAIGHT UNIT**

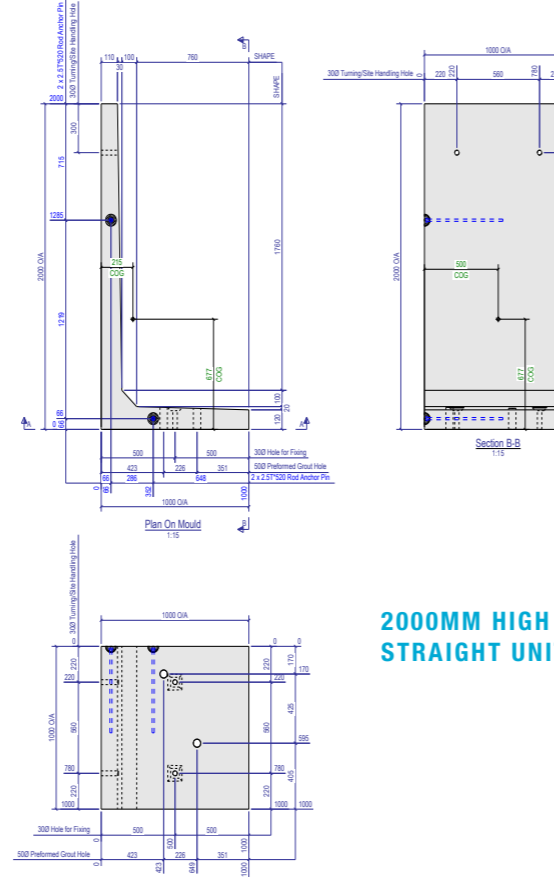

**2000MM HIGH STRAIGHT UNIT**

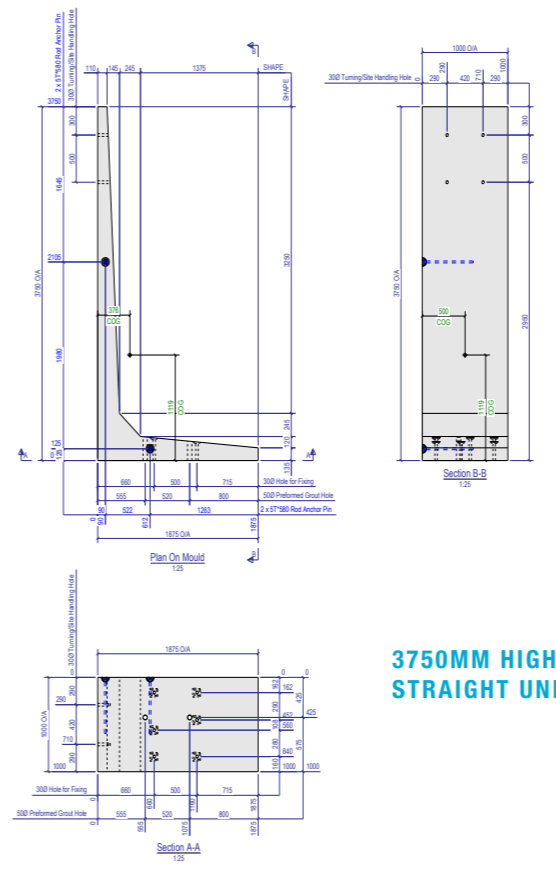


**3750MM HIGH STRAIGHT UNIT**


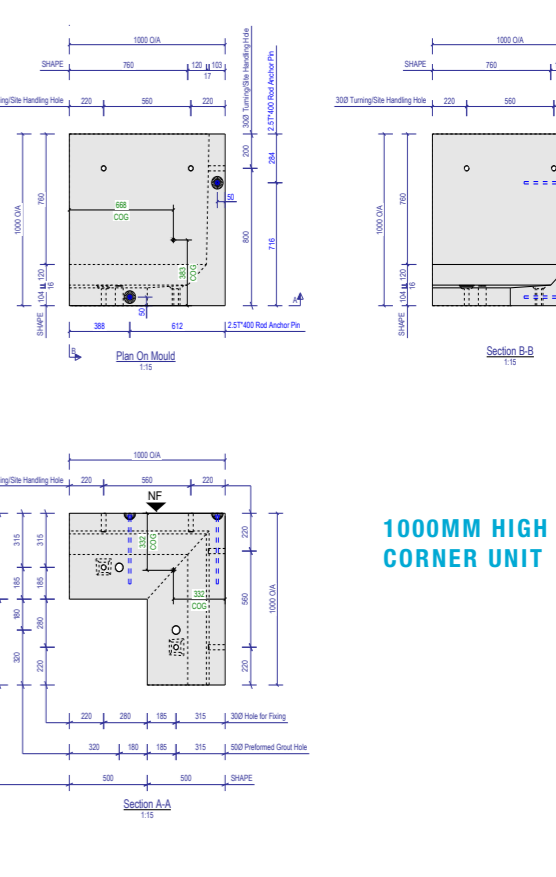


**1000MM HIGH CORNER UNIT**



# L WALLS - CORNER UNITS

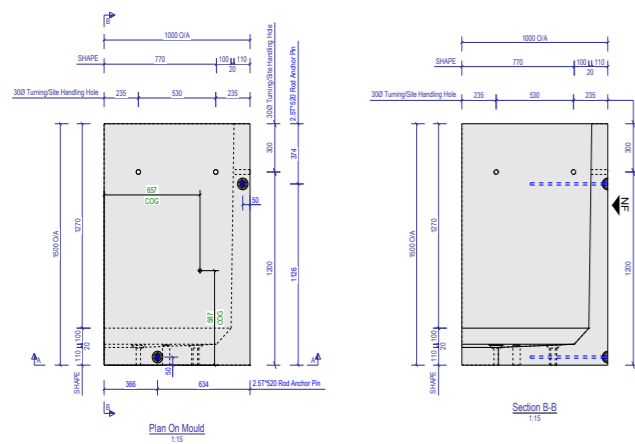



**1500MM HIGH CORNER UNIT**

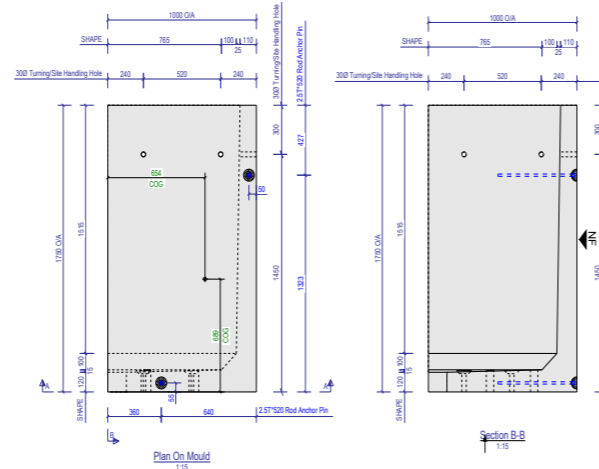


**1750MM HIGH CORNER UNIT**

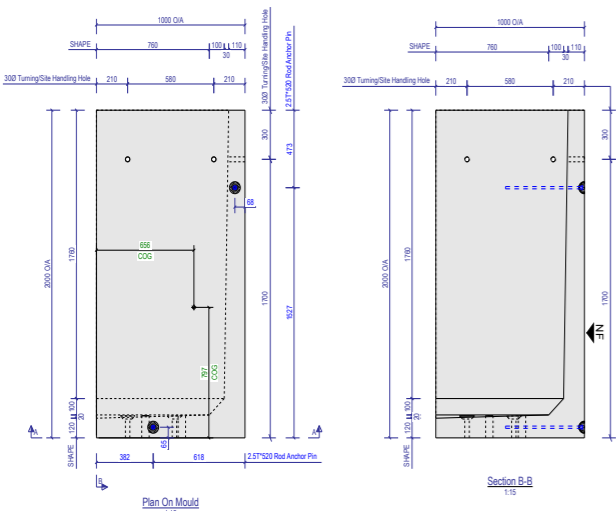


**2000MM HIGH CORNER UNIT**

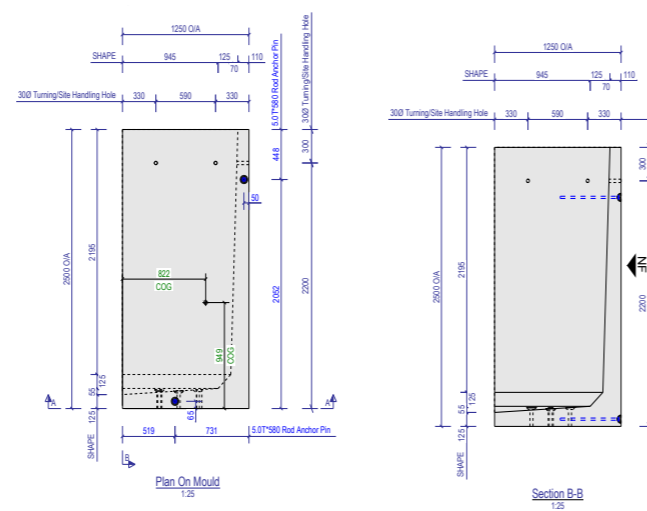

**2500MM HIGH CORNER UNIT**




# L WALLS - CORNER UNITS

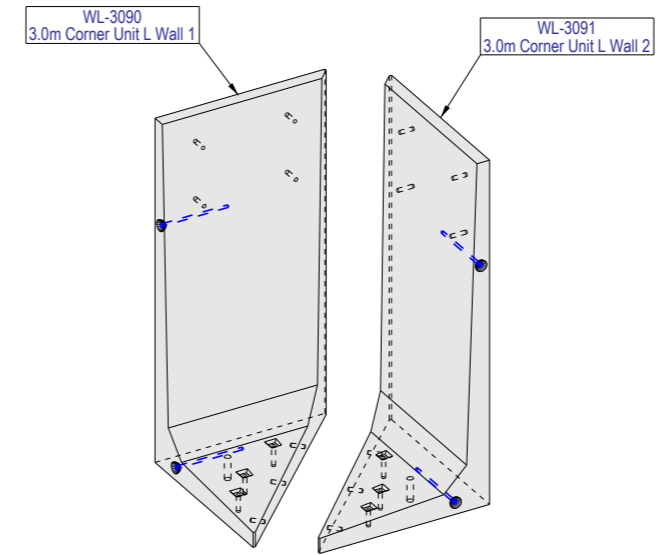



Isometric View (Exploded) of  
3.0m Corner Unit

**3000MM HIGH SECTIONS 1 & 2 CORNER UNIT**

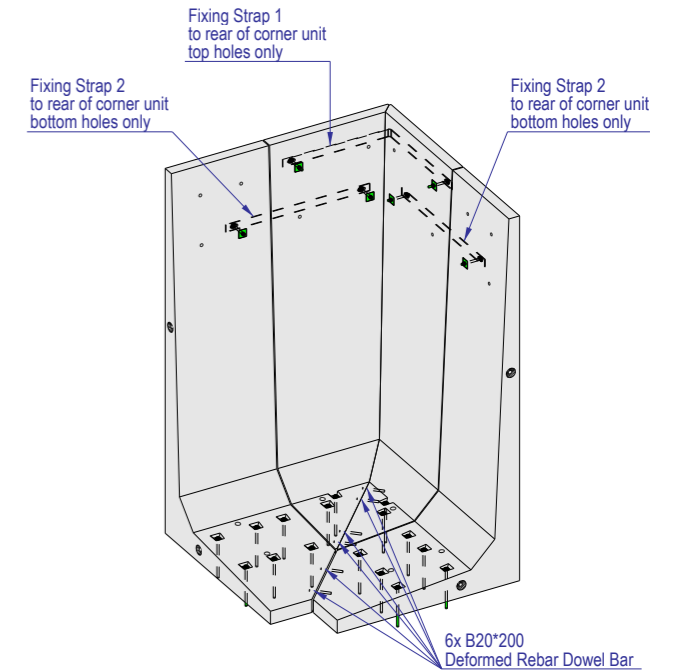

Isometric View of  
Assembled 3.75m Corner Unit

**3750MM HIGH SECTIONS 1, 2, 3 & 4 CORNER UNIT**

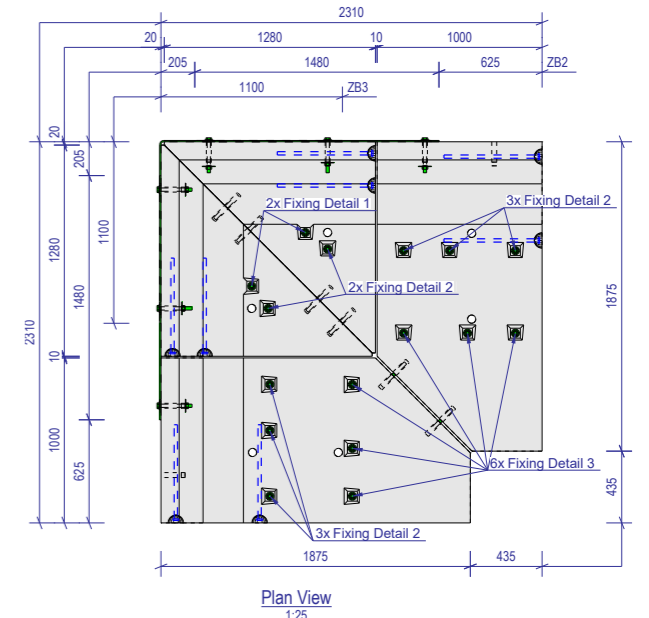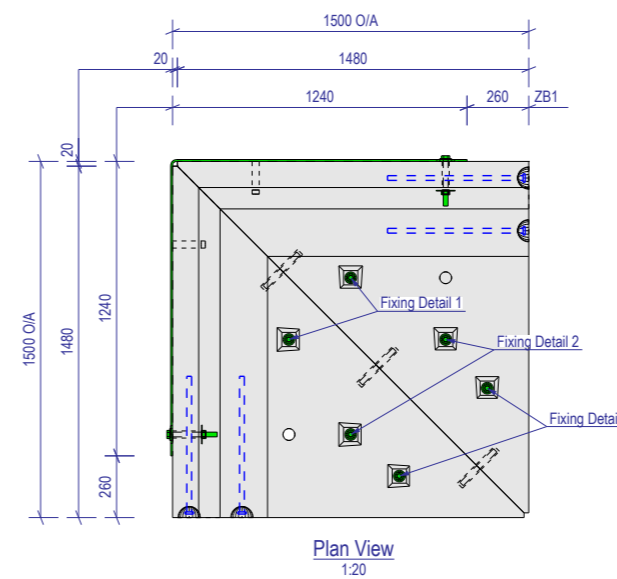

# BED WALL DESIGN

BRICK SLIP AND RECKLI FINISH AVAILABLE

FP McCann's precast Bed Wall units are ideal for forming both retaining and containing structures in residential, commercial, industrial and waste developments.

## PRODUCT FEATURES

- Bed Wall units are an ideal product where speed of installation is necessary
- They offer a fast, cost-effective solution to constructing retaining and containing developments
- Standard sizes range from 1m high up to 3.5m high
- Available in up to 4m widths (height dependant) for even quicker installation
- 90° corner and 15° mitred units available

## PRODUCT BENEFITS

- Large range of heights and widths available
- Quick and easy installation, up to 4m lengths
- Create storage bays without imposing a load to the building frame
- No specialist trades required
- Retain material up to 19kN/m<sup>3</sup> and AoR 20° or an additional 50kNm<sup>2</sup>
- Stability
- Loaded over the base of the unit only
- Handrail loading of 1.5kN
- No heel – sheer reverse face (GB only)

## PRODUCT APPLICATIONS

- Retaining walls
- General soil retention
- Waste recycling walls
- Storage facilities
- Division walls
- Making up levels within buildings
- Bunker walls

## INSTALLATION GUIDE

1. Position unit(s) on shims (min 5mm - max 20mm).
2. Dry pack rammed under perimeter to create grout barrier.
3. Fix excalliburs to ALL anchor pockets.
  - A) Drill pilot hole embedment depth +40mm (to allow dust collection into foundation through 23mm through hole).
  - B) Remove collected dust from drilled hole by easing the drill bit up and down within the hole.
  - C) Using an impact wrench set to slow - Start install M20x300 Excallibur(s) with washer(s).
4. Use grout holes to completely flood to the underside of the unit.
5. Wait min 24 hours before backfilling and loading the unit



# BED WALL DESIGN

BRICK SLIP AND RECKLI FINISH AVAILABLE

## RECKLI BED WALL FINISH



## BRICK SLIP L WALL FINISH



## BED WALL UNITS




# BED WALLS

## STANDARD SIZES

Designed for retained material with a density of 18 kN/m<sup>3</sup>  
(approximate bulk density of 1835 kg/m<sup>3</sup>)

Height (mm)	Width (mm)
1000	1.0m-4.0m
1500	1.0m-4.0m
1750	1.0m-4.0m
2000	1.0m-4.0m
2500	1.0m-3.0m
3000	1.0m-2.0m
3500	1.0m-2.0m

(Include 5% lifting allowance)

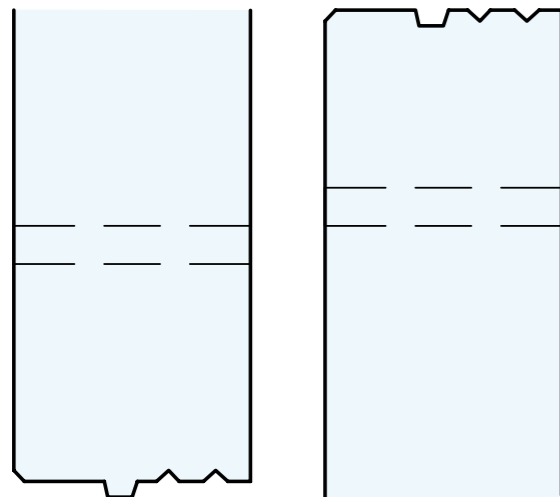

\*optional joint detail, design may vary slightly



## ANCHORS FOR STANDARD CONDITIONS




For anchor requirements please refer to unit drawings.





# BED WALLS - OFFLOADING INSTRUCTIONS

Off-loading must be carried out using appropriate certified lifting equipment, chains of the correct length for the angle of lift and the correct lifting devices for the cast in lifters.



Bed walls are supplied with 4 lifters anchors in the face of each unit. Using certified lifting chains with FP McCann offloading accessories (as detailed on our product GA Drawing) to attach to these anchors and offload/move the units around site. The minimum angle between each chain and horizontal surface of the Bed Wall is 60°.

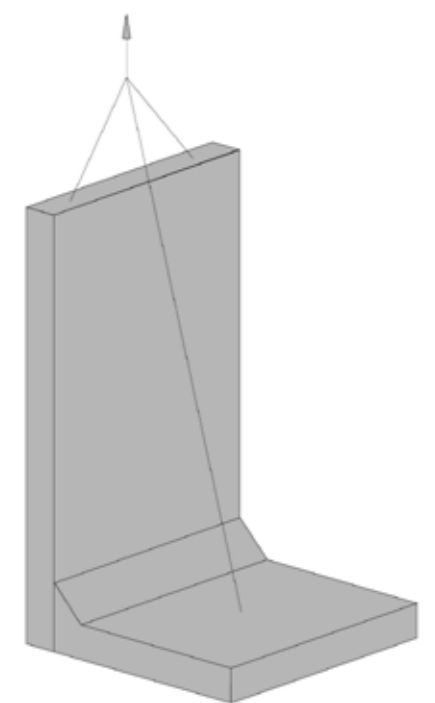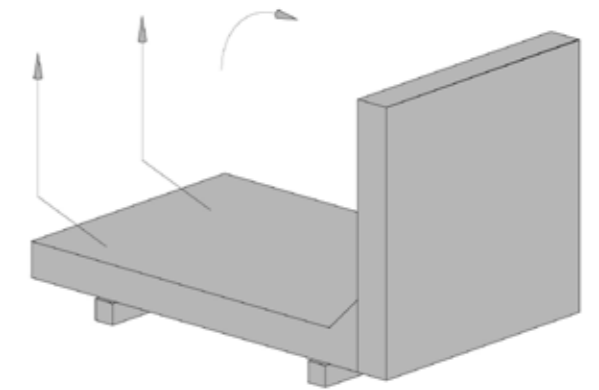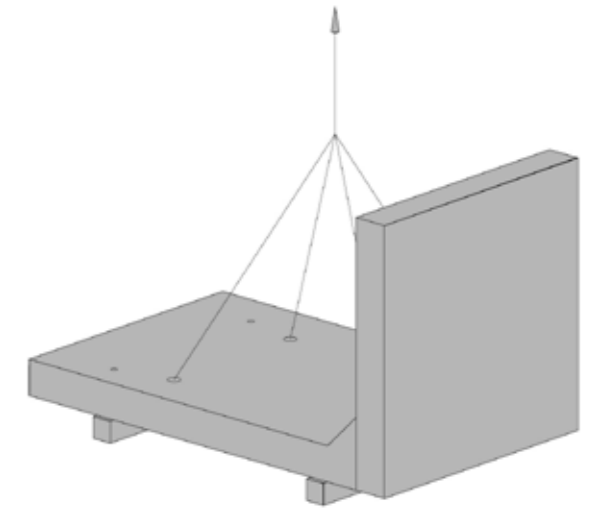



# BED WALLS - STRAIGHT UNITS

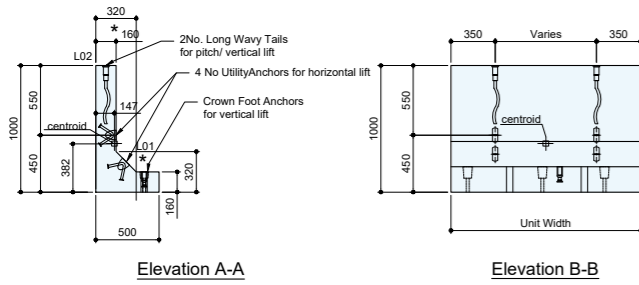



**1000MM HIGH STRAIGHT UNIT**

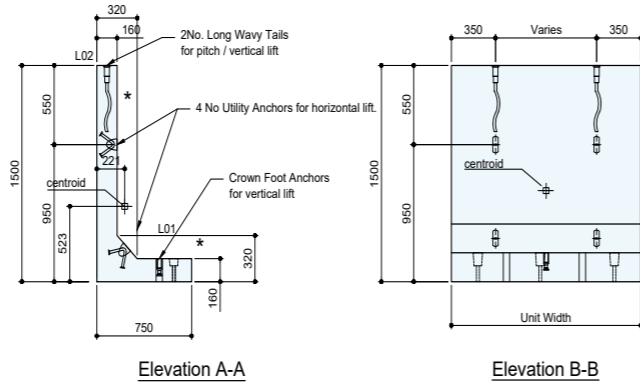



**1500MM HIGH STRAIGHT UNIT**

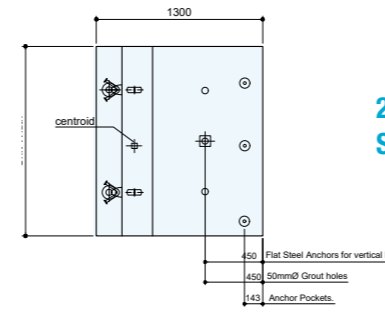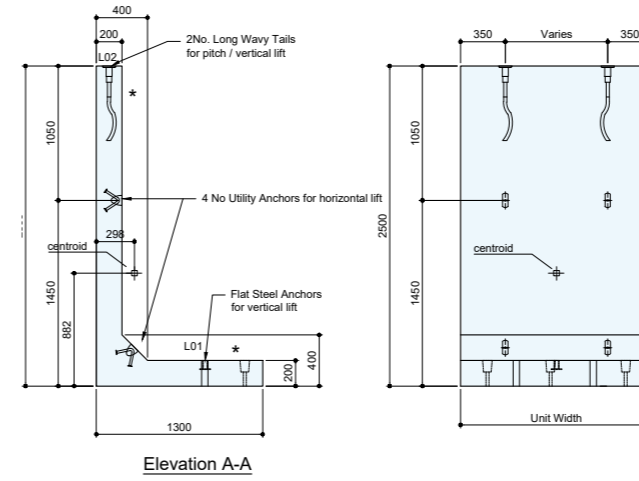



**2500MM HIGH STRAIGHT UNIT**

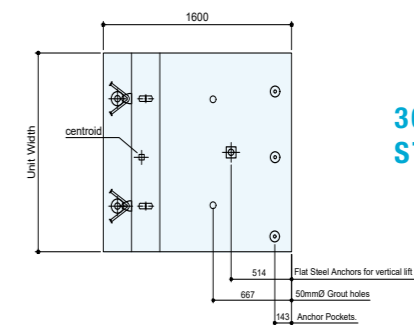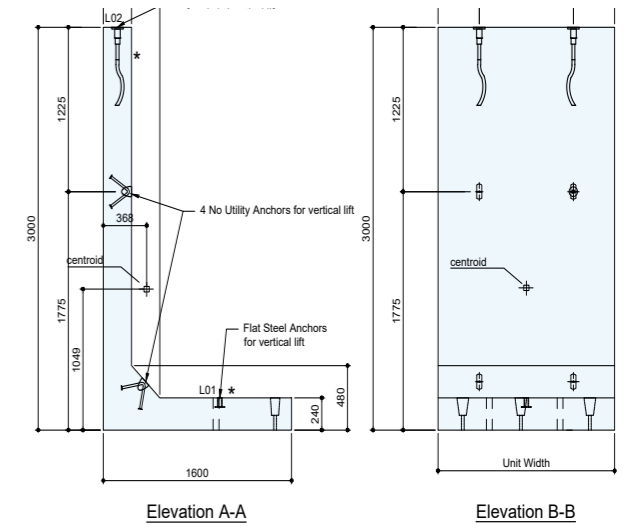



**3000MM HIGH STRAIGHT UNIT**

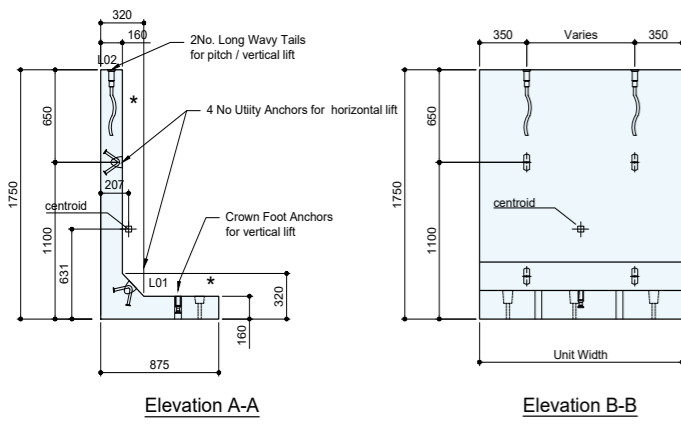

**1750MM HIGH STRAIGHT UNIT**

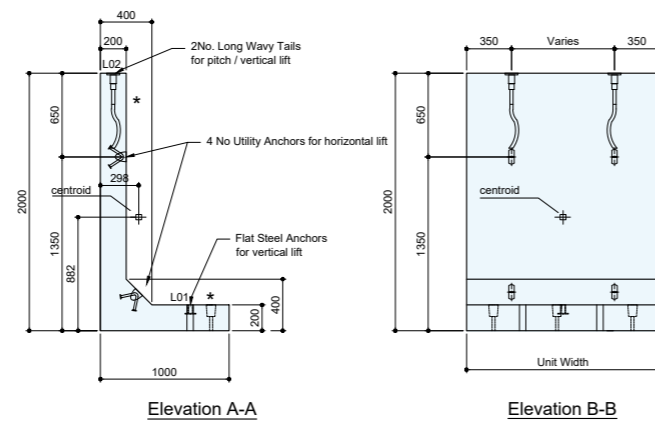


**2000MM HIGH STRAIGHT UNIT**

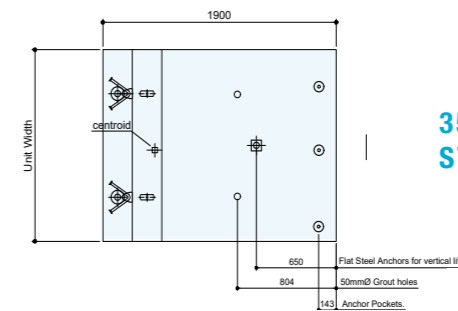
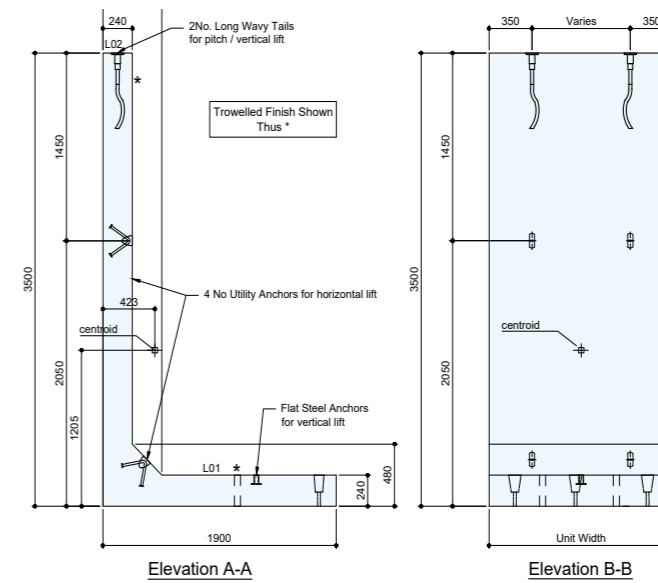


**3500MM HIGH STRAIGHT UNIT**


# BED WALLS - CORNER UNITS

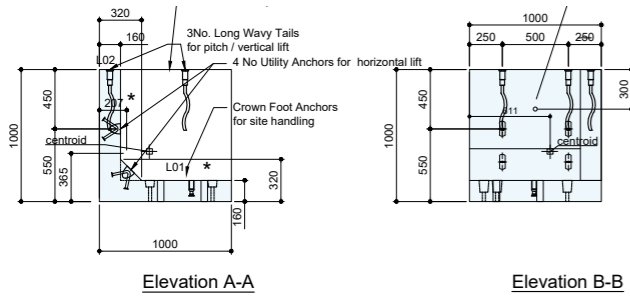


**1000MM HIGH CORNER UNIT**

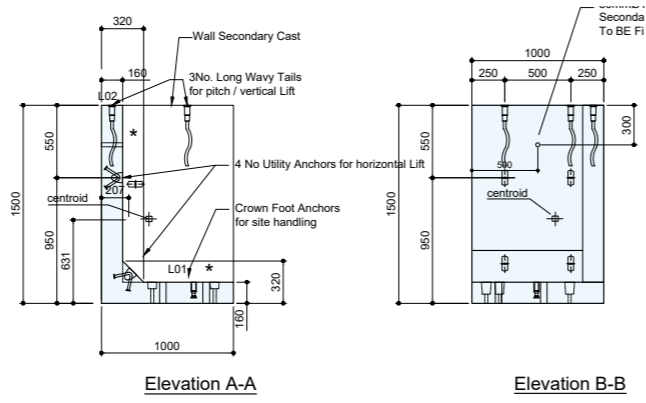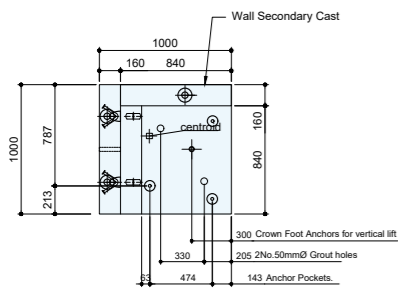



**1500MM HIGH CORNER UNIT**

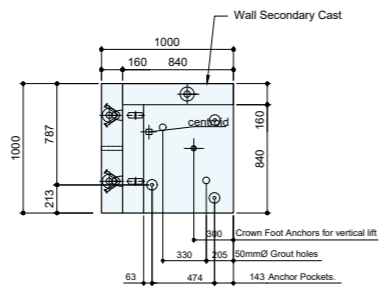



# BED WALLS - CORNER UNITS

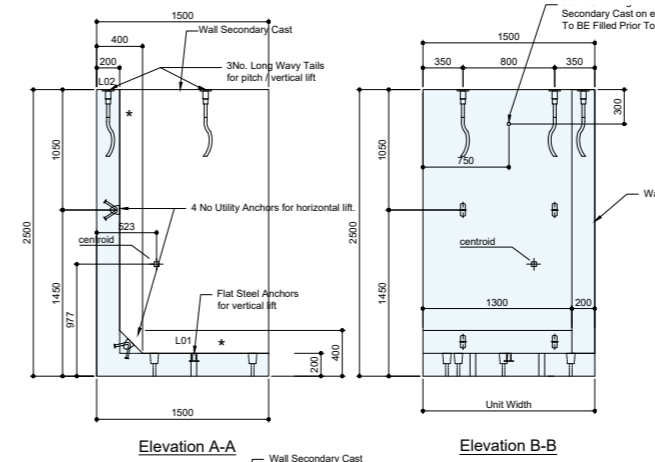



**2500MM HIGH CORNER UNIT**

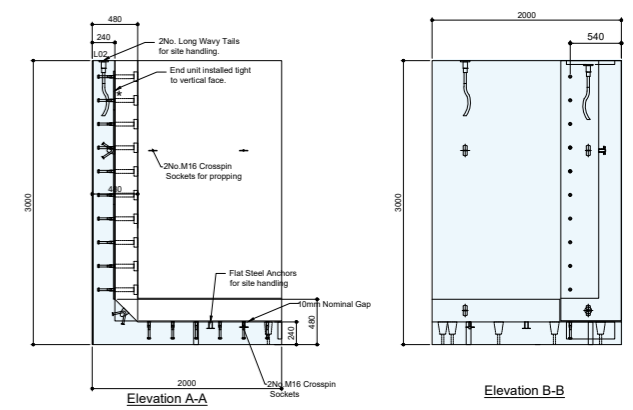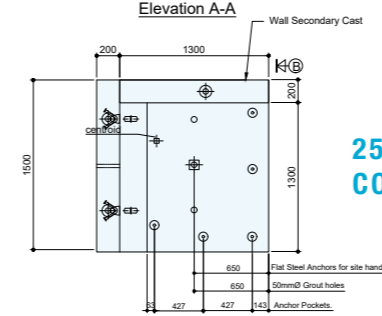



**3000MM HIGH CORNER UNIT**

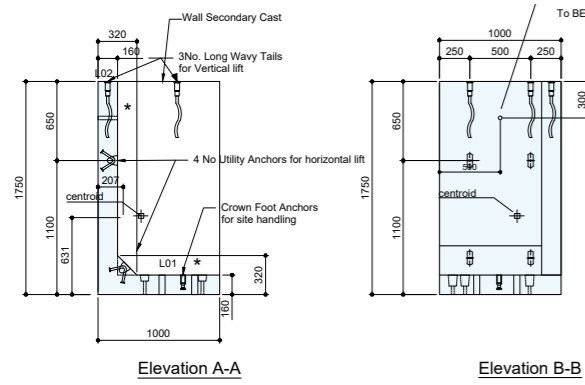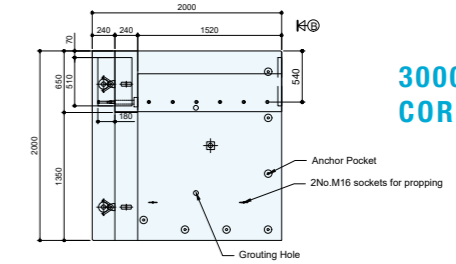


**1750MM HIGH CORNER UNIT**

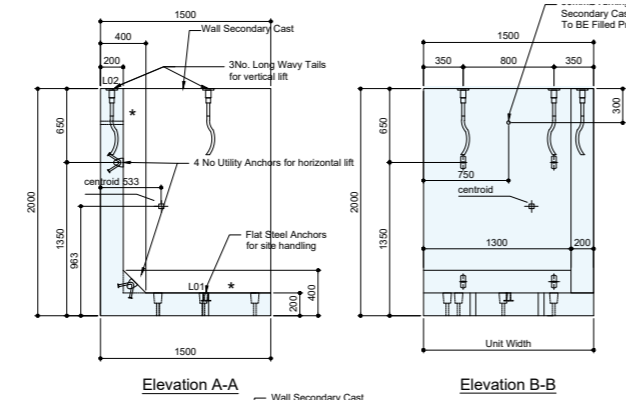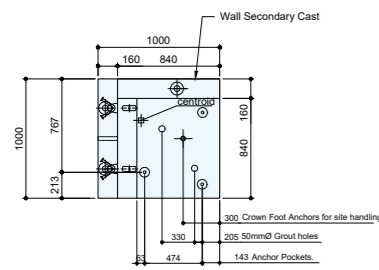

**2000MM HIGH CORNER UNIT**

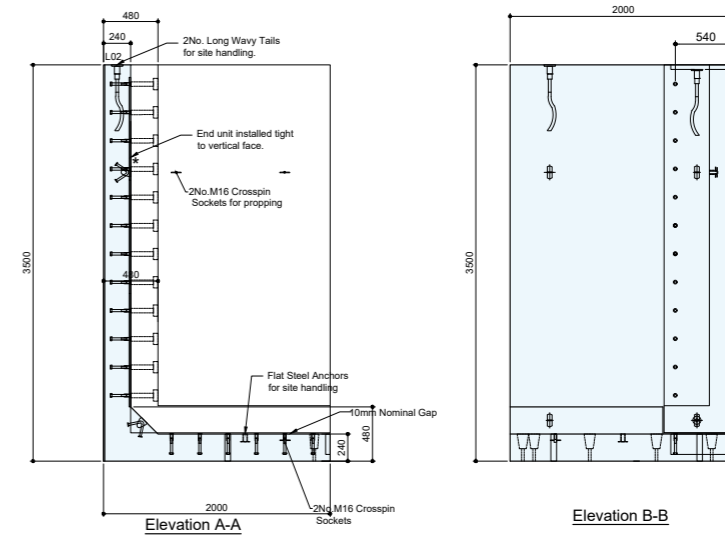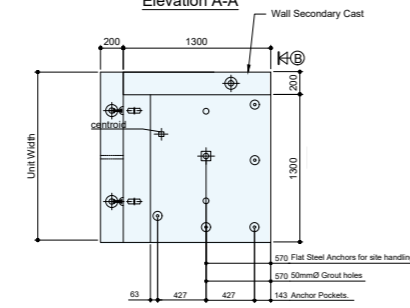

**3500MM HIGH CORNER UNIT**

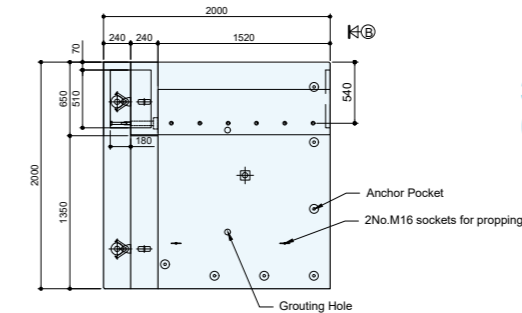


# BED WALLS WITH BRICK SLIPS

## ARMIS RANGE - 4-6 WEEK LEAD TIME



## PELARIS RANGE - 4-6 WEEK LEAD TIME

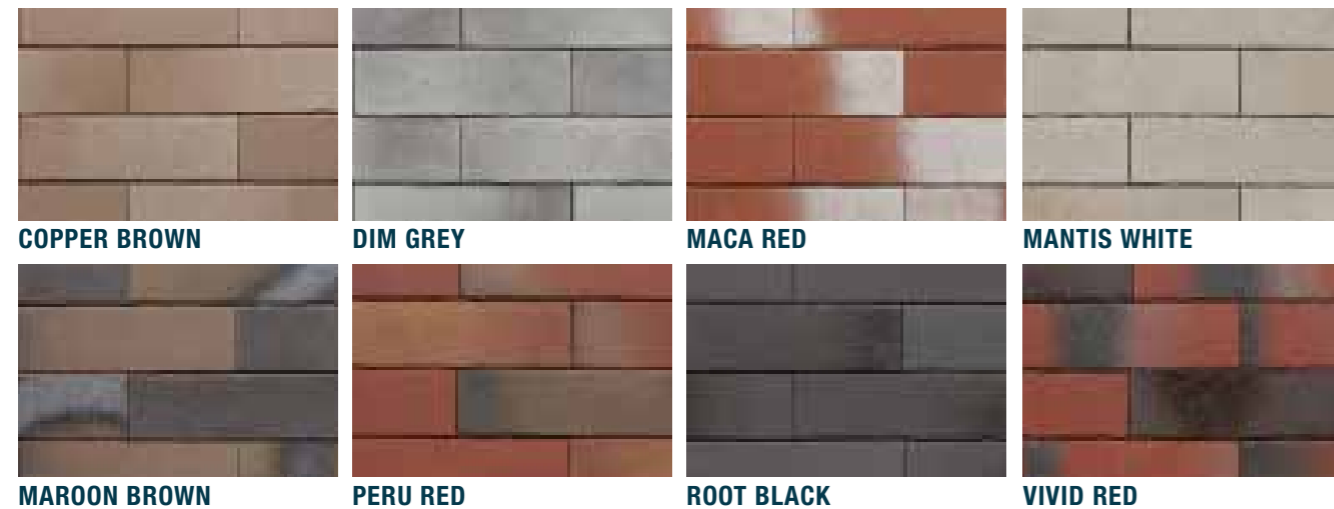

### FEATURES AND BENEFITS

- Reduced embodied CO<sub>2</sub> and reduction in CO<sub>2</sub> from transport.
- Prolonging raw material (less material per m<sup>2</sup>).
- Lighter product and easier to handle than traditional bricks.
- Conforms to EN ISO 10545-12
- Fully frost resistant.
- Low water absorption (less than 3% absorption).
- High standard of fire safety (A1 fire rating).
- More cost effective than traditional cut brick slips.
- Slips can be assembled off-site, reducing on-site labour.
- Brick slip finish for finished wall
- Larger lengths for quicker install
- Retain material up to 19kN/m<sup>3</sup> with an AoR 20°
- Loads up to 50kN/m<sup>2</sup> surcharge when loaded over the toe/base of the unit
- Tight size tolerances (+/-2mm) - precise corners available.

# BED WALLS WITH BRICK SLIPS


## ARMIS RANGE - 12 WEEK LEAD TIME



## PELARIS RANGE - 12 WEEK LEAD TIME




## FASANIS RANGE - 12 WEEK LEAD TIME

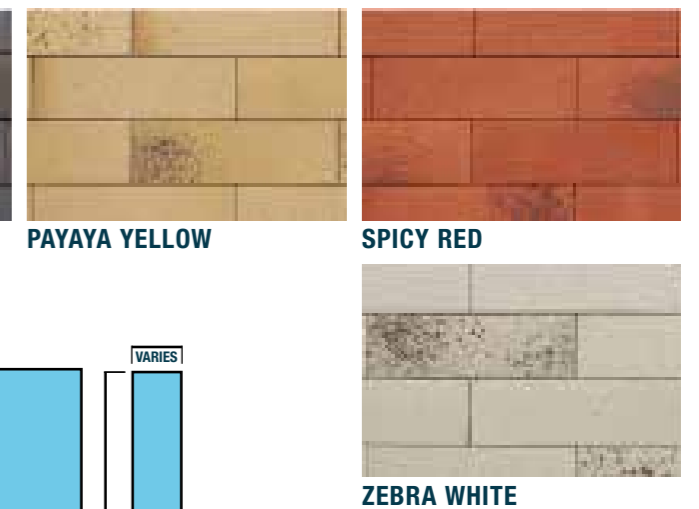

### L WALL HEIGHTS AVAILABLE:

Please refer to the bed wall drawings for dimensions

Heights (A)	Widths (B)
1.0m	1.0m-4.0m
1.5m	1.0m-4.0m
1.75m	1.0m-4.0m
2.0m	1.0m-4.0m
2.5m	1.0m-3.0m
3.0m	1.0m-2.0m
3.5m	1.0m-2.0m

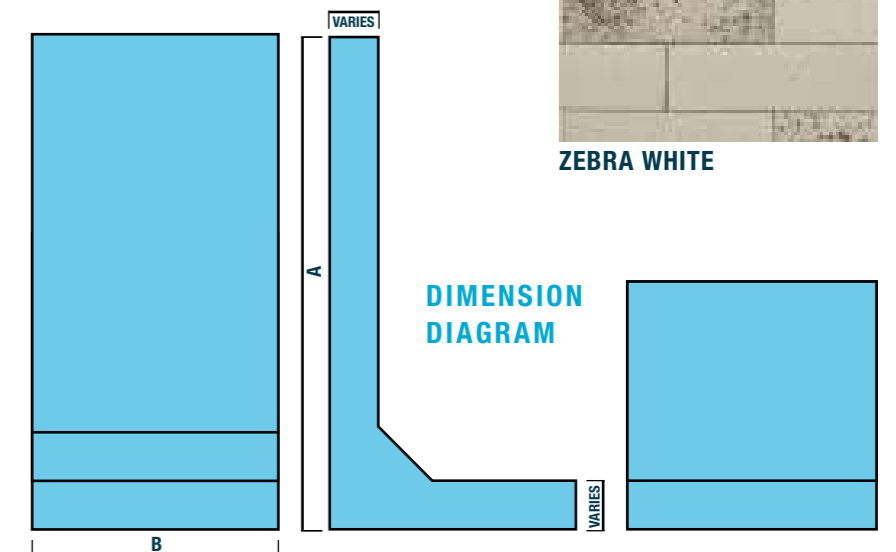

# L WALLS - 4M - 6M UNITS

## PRODUCT BENEFITS

- Available in heights 4.0 – 6.0m
- 1.0m & 2.0m lengths
- Quick & easy to install
- No specialist trades required
- 20 kN/m<sup>2</sup> surcharge loading



## DIMENSIONS

Product Code	Size	Weight (T)	Embeds/Fixings				Lifters
			No.	Dia	Length	Embed	
WL-4000	4.0m x 2m Straight	10.08	6	20	300	176	RD 52
WL-4001	4.0m x 1m Straight	5.07	3	20	300	176	RD 52
WL-4500	4.5m x 2m Straight	10.69	6	20	300	176	RD 52
WL-4501	4.5m x 1m Straight	5.37	3	20	300	176	RD 52
WL-5000	5.0m x 2m Straight	11.30	6	20	300	176	RD 52
WL-5001	5.0m x 1m Straight	5.68	3	20	300	176	RD 52
WL-5500	5.5m x 2m Straight	12.00	6	24	300	176	RD 52
WL-5501	5.5m x 1m Straight	6.03	3	24	300	176	RD 52
WL-6000	6.0m x 2m Straight	12.61	6	24	300	176	RD 52
WL-6001	6.0m x 1m Straight	6.34	3	24	300	176	RD 52




## FOUNDATIONS


The foundation requirements should be determined by a qualified engineer. Units placed on a concrete foundation should be bedded on mortar and wedged to attain correct alignment. FP McCann recommends that L wall units are suitably anchored to the foundation.

## EXCALIBUR INSTALLATION PROCEDURE

- Drill pilot hole embedment depth + additional 60-70mm (to allow for dust collection) into foundation through slotted hole.
- Remove collected dust from drilled hole by easing the drill bit up and down within the hole.
- Using an impact wrench set to slow-start install Fixing with washer plate.
- Void in precast toe to be fully filled with FP McCann High Performance Grout.

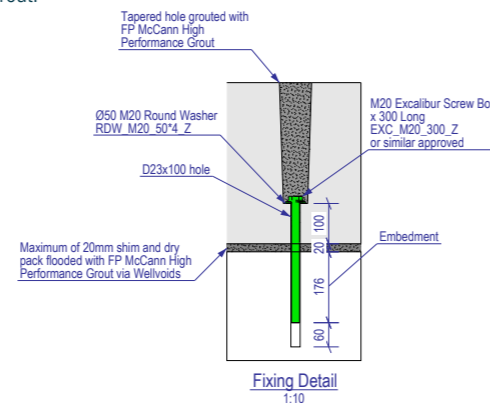


# L WALLS - 4M-6M UNITS

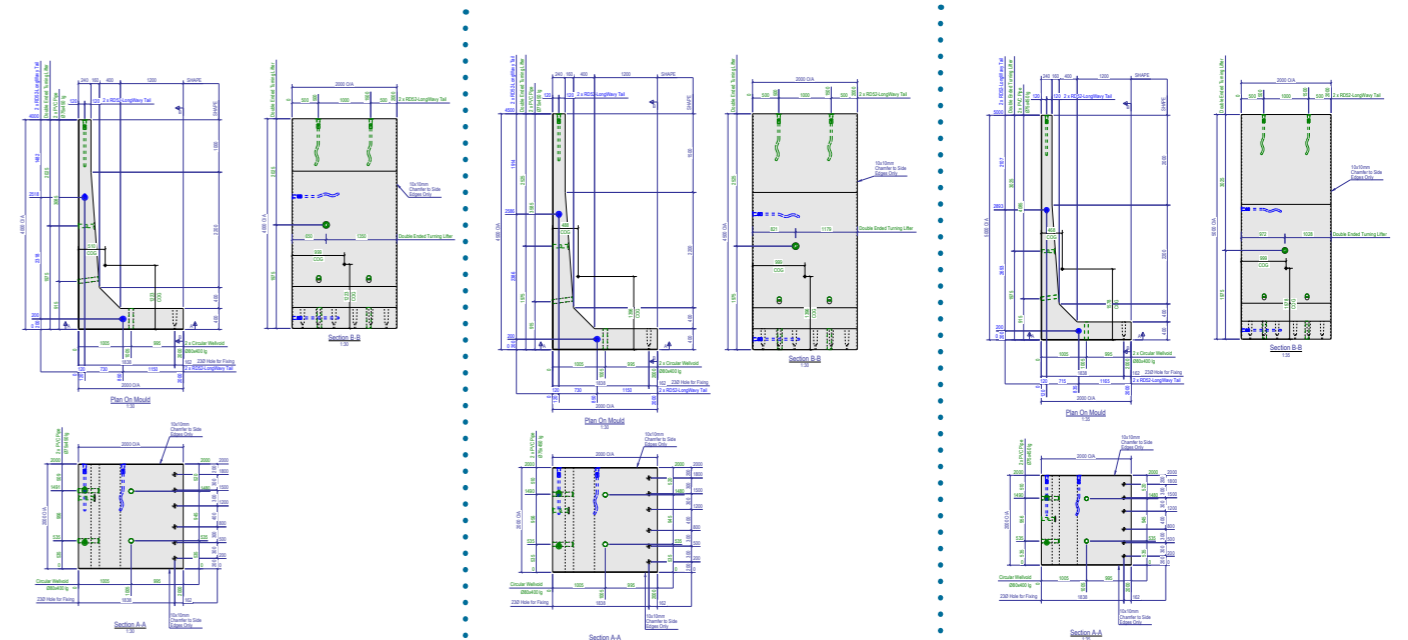

4000MM HIGH STRAIGHT UNIT

4500MM HIGH STRAIGHT UNIT

5000MM HIGH STRAIGHT UNIT

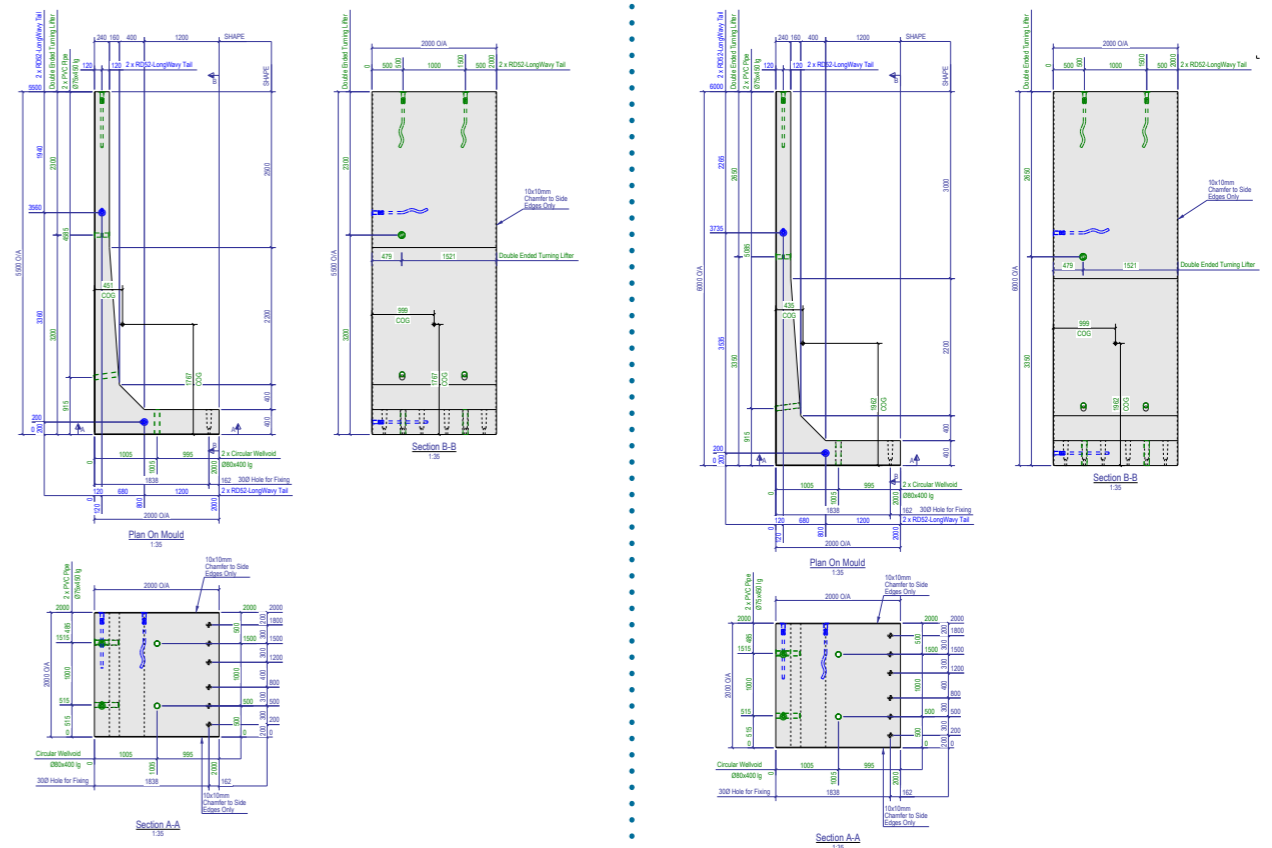

5500MM HIGH STRAIGHT UNIT

6000MM HIGH STRAIGHT UNIT

# BESPOKE L WALL DESIGN AND MANUFACTURE SERVICE 6.5M - 9.0M

## INTRODUCTION

FP McCann offers a complete design and manufacture service for bespoke L-Walls, with heights ranging from 6.5m to 9m.

Our experienced in-house team works closely with your specifications to develop a tailored, fully engineered solution that meets the unique demands of your project delivering both performance and ease of installation.

Every unit is manufactured to meet our rigorous quality standards, ensuring long-lasting durability and reliability on site.

## KEY FEATURES AND BENEFITS

- Fast & Efficient Installation  
Minimises time on site and accelerates project programmes
- Exceptional Quality  
Manufactured to the highest standards for strength and durability
- Flexible Design Options  
Can be engineered to accommodate loading from either side
- Integrated Solutions  
Fully compatible with other walling systems, including Prestressed Panels and standard L-Wall units (1m -6m heights available)

For further information on designing contact [wallingquotes@fpmccann.co.uk](mailto:wallingquotes@fpmccann.co.uk)



# WALLCAST

DECORATIVE PRECAST WALLING & FENCING


## FEATURES & BENEFITS

- Panel and column wall sections allow for quick and easy installation
- Easier boundary wall installation saves time and reduces labour costs
- Unique rigid footing system allows for safer boundary wall installations
- Textures can be applied to one side of boundary walls for optimal beauty and appeal
- Reflective sound barrier properties


## PRODUCT APPLICATIONS

- Boundary Walls
- Perimeter Walls
- Residential Projects
- Security Walls
- Architectural Walls
- Stand Alone Columns
- Sound Barrier Walls

## AVAILABLE FINISHES

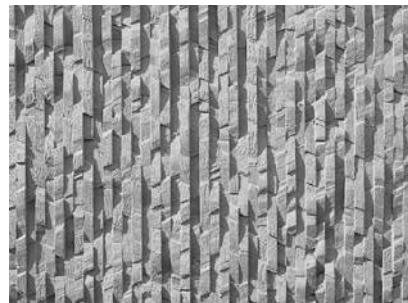


RHEIN

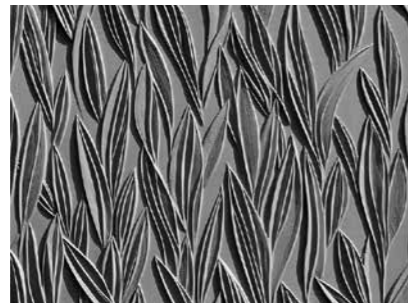

VOLTA



YUKON

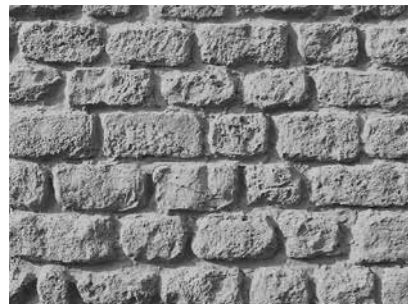

MAYENNE



POMMERN



# PRESTRESSED HORIZONTAL PANELS

FP McCann's prestressed horizontal panels allow you to construct walls quickly and efficiently with the future-proof option of re-siting, if required; providing the ideal solution where the adaptability of buildings is important. Our wall panels are manufactured using prestressing wires and a C45/55 concrete, which gives them in-built strength and resilience.

## PRODUCT BENEFITS

- Tongue and grooved joints for easy alignment and positive sealing
- Smooth impervious surface which is easily washed down
- Prestressed panels absorb minor accidental damage
- More cost-effective – more versatile than blockwork
- Tailor-made lengths and a variety of widths
- Simplistic and quick installation
- No foundation required



## STABILITY AND DURABILITY

FP McCann's prestressed panels are highly resistant to accidental damage, as they can flex on impact when normal block walls could crack. Panels are easily removed and re-sited within the existing farm plant, providing flexibility to change a configuration of the structure as the client's future needs evolve.


Considerable wall heights can be achieved through stacking horizontal panels (spanning between columns or fixed within the walls). Various panel heights are available including 1000mm, 1200mm and 1500mm; these can be mixed and matched according to the client's requirements.

This system is particularly useful for raising internal and external ground levels in or around a building frame, or for kingpost applications to retain an earth bank.

## FOUNDATIONS

Connected to the building frame by transmitting the load against stanchions, these panels are held in place with bolts and cleats and do not require foundations.


# PRESTRESSED HORIZONTAL PANELS

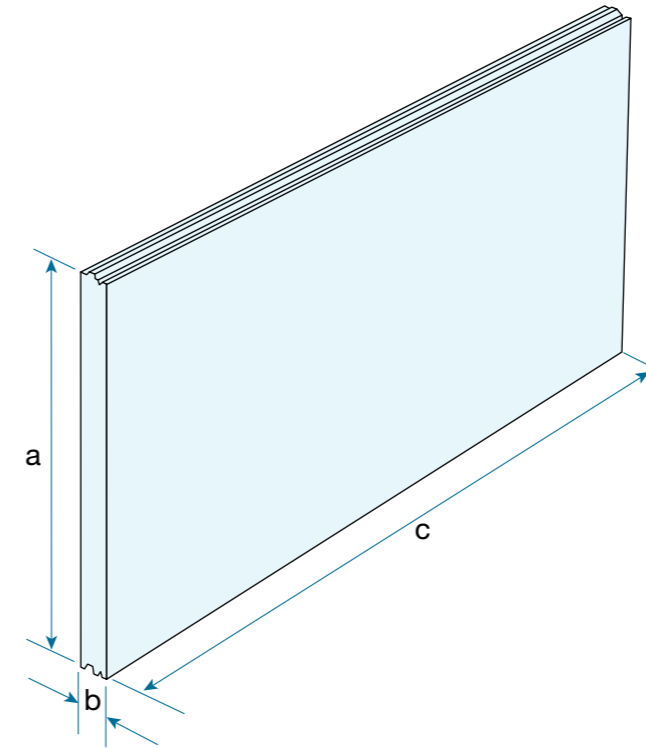

Dimensions - Horizontal Panel					
(a) Panel Height	1.0m	1.2m	1.5m		
(b) Panel Thickness	80mm	120mm	160mm	200mm	240mm
(c) Panel Length	To suit the project, limited by load/span and handling considerations				



## HANDLING AND INSTALLATION

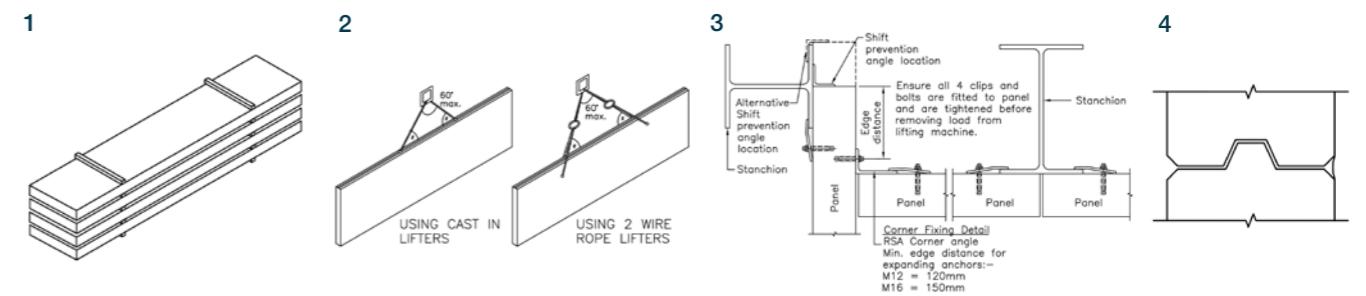

Panels to be offloaded from delivery vehicles and stacked on flat hard standing. Stacking timbers to be placed between panels directly above the one below, as shown. Do not stack panels more than 6 high. The panel weights are marked on each panel.

Using suitable lifting machine, fix wire rope slings (or D shackles) to pre-formed holes in panels or proprietary lifting devices to cast-in lifters. All units to be lifted under the direction of a banksman.

Ensure all 4 clips and bolts are fitted to panel and are tightened before removing load from lifting machine.

**NOTE:**  
Bolts must be regularly checked for tightness.

Seal and tool joints using gunned mastic.

Refer to FP McCann manual for instructions.

# PRESTRESSED VERTICAL CANTILEVER PANELS

The FP McCann Prestressed Vertical Cantilever Panel system provides the user with a more cost-effective and time-efficient system when comparing against a traditional on-site, in-situ wet-cast system.

## PRODUCT FEATURES


- The vertical cantilever panels are prestressed, allowing greater strength in a more slender panel
- Prestressing reduces the incidence of tensile cracking in the panels
- The concrete used for the prestressed panels is designated as a C45/55 grade
- The foundation can be individually designed to suit site and loading requirements
- The prestressed panels are tongue and grooved together, allowing effective sealing between units without stressing the sealant
- The units are lighter so require smaller site lifting vehicles
- The prestressed unit can be lifted and handled more easily on site
- Manufactured on 70m long prestressing beds, retained heights of up to 4m can be achieved for many material types
- Manufactured to ISO 9001 and ISO 14001

Depending on the prestressed panel thickness, security or fire walls can achieve a fire exposure rating of up to 4 hours and effective heights of up to 7.5m maximum. The units are cast as standard with a Class A steel mould finish to one side and all edges, complete with hand trowelled finish to the other face.

During the casting process, Wavy Tail Lifters can be cast-in to the top edge of the panel to assist with on-site installation.

## PANEL APPLICATIONS

- Soil retention
- Retention of materials / aggregates
- Silage clamps
- Underground slurry stores
- Basements of structures
- Waste recycling bunkers
- Prison security walls
- Substation fire walls
- Flood alleviation schemes

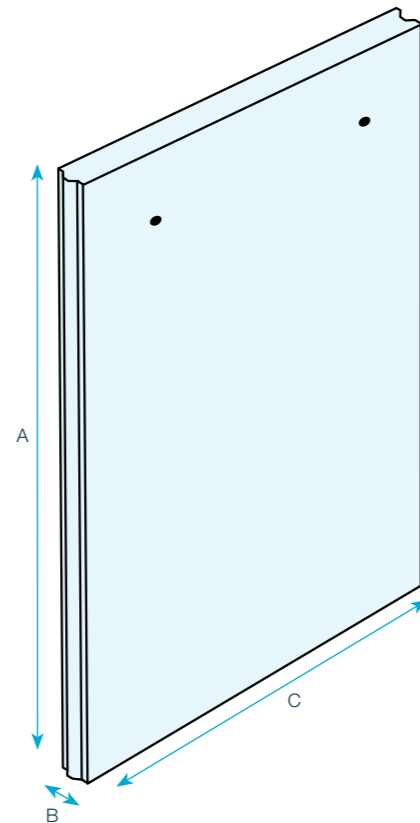


Dimensions - Vertical Panel				
(a) Panel Lengths	To suit the project, limited by load/span and handling considerations			
(b) Panel Thickness	120mm	160mm	200mm	240mm
(c) Panel Widths	1.5m standard, 1m and 1.2m special order			

# PRESTRESSED VERTICAL CANTILEVER PANELS



## HANDLING AND INSTALLATION

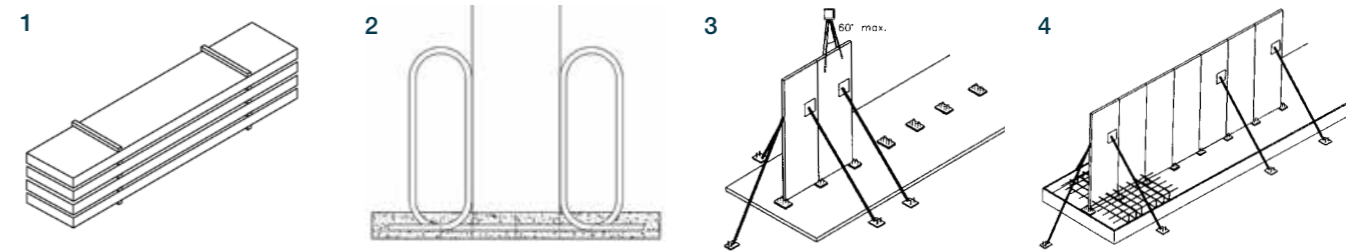

Panels to be off-loaded from delivery vehicles and stacked on flat hard standing. Stacking timbers to be placed between panels directly above the one below, as shown. Do not stack panels more than 6 high. The panel weights are marked on each panel.

Foundation trench is excavated and a strip footing formed in the base. Cradles are set out on the footing, and the panels lowered into them, shimmed and levelled as necessary. Temporary propping must be used - the frequency depending on height and exposure.

Second Panel to be propped as detailed in stage 3. Load maintained by lifting machine until panel is adequately propped.

Set up rebar and framework. Do not remove props until adjacent units are secure. Seal joints as required. Pour and compact concrete. Props to remain in position until foundation concrete is in excess of 25N.

# ROCKET WALLS™

Our Rocket Walls are high quality, freestanding, precast concrete units. They are designed to be sited on an existing concrete floor slab or foundation and, for improved site safety and maximum efficiency, are bolted down using fixing bolts to prevent movement. It is this uniqueness that makes them suitable for a variety of uses.


## PRODUCT BENEFITS

- Simply installed and easily moved
- Designed for materials up to 16kN/m<sup>3</sup>
- Manufactured to ISO quality and environmental standards
- Inverted Y shape design provides high capacity
- Value engineering means less concrete than typical alternatives
- Engineered to allow for up to 4m high units and 1.25m wide
- No protruding foot
- Ideal for bunkers and division walls
- Self-shedding units – prevents the lodging of stored material
- Corner units available
- Load one side or both





## GUIDELINES FOR INSTALLATION

1. Position the units directly on to the concrete slab/foundation or on a mortar bed, or shim and dry-pak if uneven.
2. Through the 30mm preformed holes drill a 250mm, 20mm diameter hole into the concrete slab/foundation. The hole should be cleaned and free of debris.
3. Secure the wall units using the Excaliber Screwbolts and torque as shown in the fixing detail.
4. All anchor positions must be used.

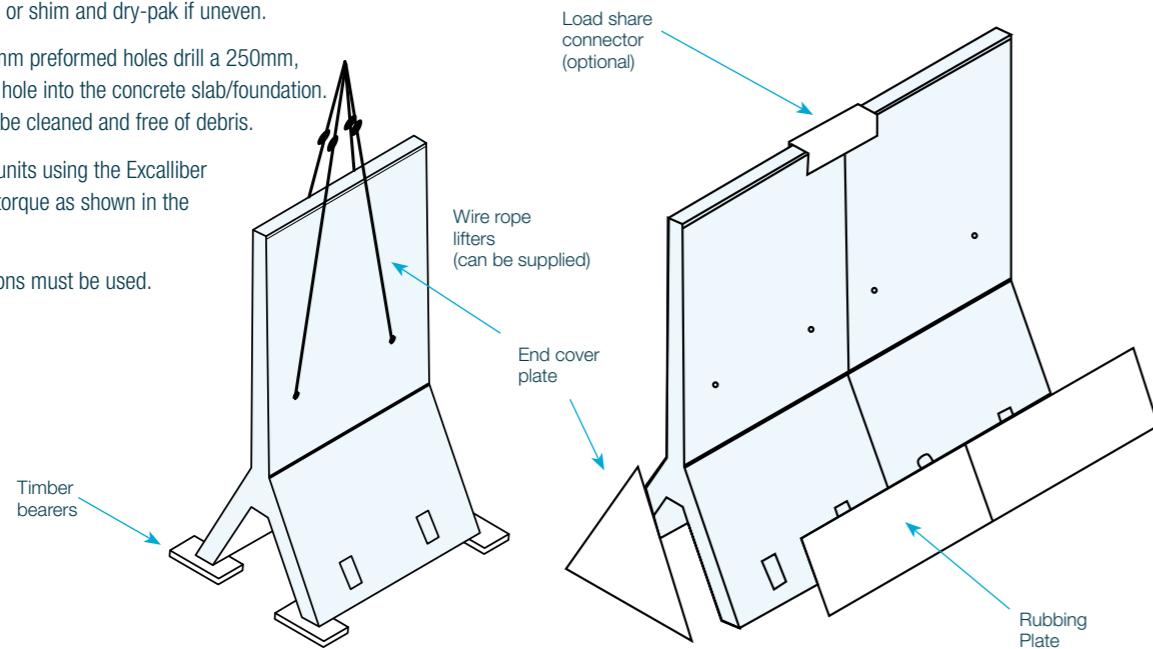

# ROCKET WALLS™ STRAIGHT AND CORNER UNITS

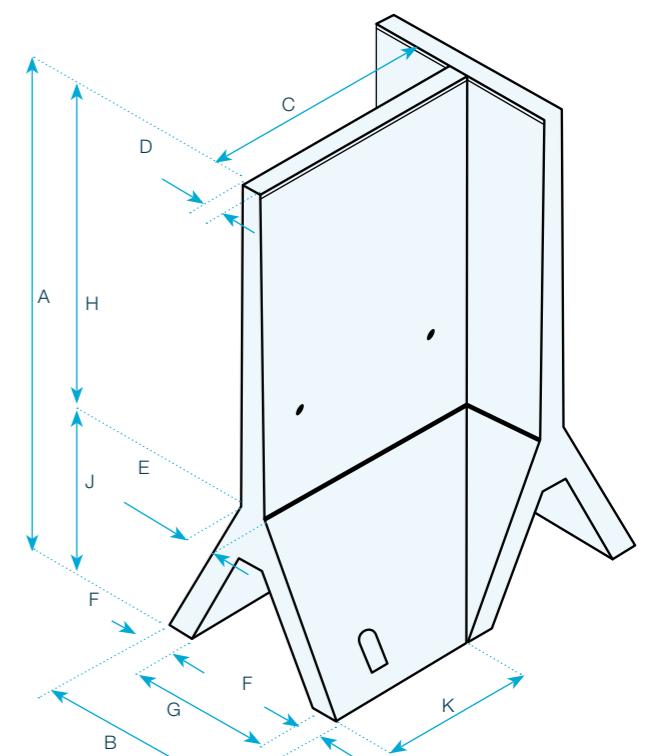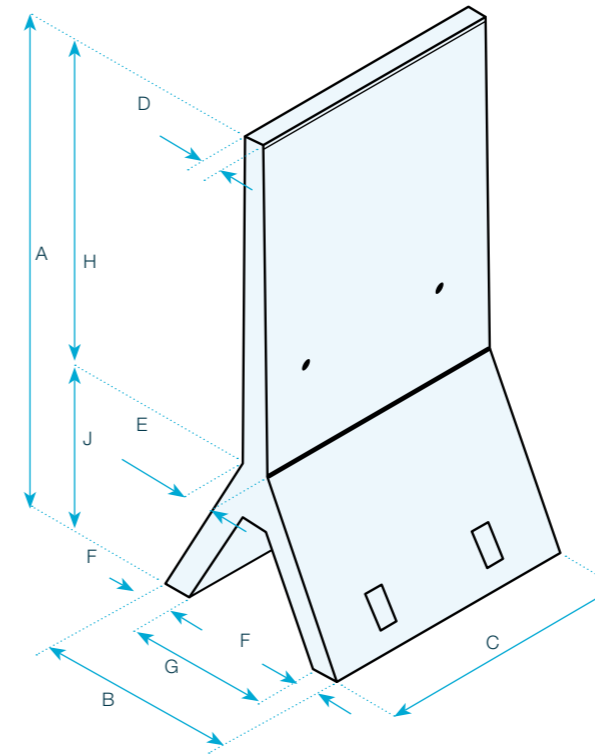

Dimensions - Rocket Wall™ (Straight)										
Height (m)	Weight (kg)	a	b	c	d	e	f	g	h	j
2.4	1100	2400	970	1250	100	131	131	710	1600	800
3.0	1860	3000	1200	1250	110	150	165	870	2000	1000
4.0	2820	4000	1650	1250	110	170	185	1280	2600	1400

Please note: A-J measurements are in mm.

## UNIT SCREW BOLT REQUIREMENTS

Height (m)	2.4 unit	2.4 corner	3.0 unit	3.0 corner
Screw bolts required (no.)	4	2	6	2
Diameter (mm)	20	20	20	20
Length (mm)	300	300	300	300
Length in foundation (mm)	190	190	190	190



Dimensions - Rocket Wall™ (Corner)											
Height (m)	Weight (kg)	a	b	c	d	e	f	g	h	j	k
2.4	1091	2400	970	1200	100	131	131	710	1600	800	759
3.0	1842	3000	1200	1200	110	150	165	870	2000	1000	680
4.0	GA Drawing available upon request										

Please note: A-K measurements are in mm.

Height (m)	4.0 unit	Corner
Screw bolts required (no.)	6	12
Diameter (mm)	20	20
Length (mm)	300	300
Length in foundation (mm)	170	170





# EASI-BLOC™ & EASI-BLOC BARRIER

Easi-Bloc™ is a precast concrete block offering solutions where limited space is available for containment.

Blocs are simplistic in design, allowing for effortless handling and speed of installation. Easi-Bloc comes in two sizes, making them ideal for a variety of applications.




## PRODUCT APPLICATIONS

- Segregation
- Temporary road blocks
- Security barricades
- Storage bays
- Agricultural bays suitable for grain, silage, etc.
- Earth retention
- Aggregate bays
- Partition walling
- Landscaping
- Waterways / Shoreline defences
- Highways
- Retaining wall

Easi-Bloc contains a central cast-in lifting loop for ease of handling and installation. Products are manufactured to comply with the requirements of BS EN 1992-1-1:2004.

Length (mm)	Width (mm)	Height (mm)	Weight (kg)
1200	600	450	800
600	600	450	400
*1400	700	700	1700
*700	700	700	850

\*Available in N.I only

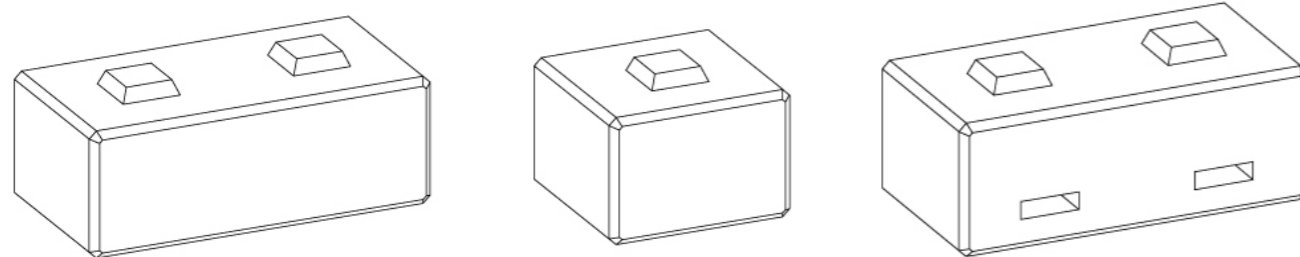

Length (mm)	Width (mm)	Height (mm)	Weight (kg)
1200	600	450	777

\*Available in GB only

# CONCRETE SAFETY BARRIERS

Our precast concrete, modular jersey barriers are ideal to use where public safety and security is a priority. They are excellent for separating lanes of traffic and for protecting construction workers and pedestrians from oncoming vehicles. They are also designed to minimise vehicle damage in the event of a collision, by allowing vehicle tyres to ride up on the lower sloped face.

Head-on collisions are also minimised by gradually lifting the vehicle and pivoting it away from oncoming vehicles and back into traffic heading in its original direction.



## PRODUCT APPLICATIONS

- Segregation
- Temporary road blocks
- Security barricades
- Traffic management
- Flood defence
- Rockfall

## PRODUCT BENEFITS

- Cost-effective
- Easy to handle and install
- Durable
- Interlocking design for easy alignment and added security
- Free-standing unit
- Provides a high level of containment
- Absorbs the impact of a moving vehicle
- Slows down the impacting vehicle quickly
- Product can be painted on request
- Reusable product

## PRODUCT DIMENSIONS

Length (mm)	Width (mm)	Height (mm)	Weight (kg)
1500	500	800	900
2500	500	800	1500



# TIMBER CLAD L WALL SYSTEM FOR BARRATT HOMES

Site: Deer's Rise, South Staffordshire

Client: Barratt Homes

Main Contractor: Friel Construction


Products Supplied: FP McCann Precast L Walls

Midlands based Friel Construction continues to utilise FP McCann's popular precast concrete L Walls on housing developments recognising the benefits the walling system can offer particularly in earth retention works. A more recent addition to the units is the contractor led application of timber cladding, adding an aesthetic look to an otherwise plain concrete face.

On the edge of the popular Cannock Chase, a designated area of outstanding natural beauty in South Staffordshire, Barratt Homes are building a new development of 2,3,4 and 5 bedroom properties. With many changes in land elevation on the 'Deer's Rise' site, there is a large requirement for earth retaining walls.

Friel Construction the main civil engineer and ground worker on site has once again adopted the FP McCann L Wall earth retention system. To date some 130 linear metres of walling has been installed comprising 1.0m, 1.5m and 2.0m high units. Laid and dowelled into a concrete foundation pad, each run of walling acts as a soil retention barrier and once fixed into position earth is backed up against the L Walls as part of the raised ground levelling work for each individual building plot and garden.

The addition of timber cladding to the concrete L Wall units provides a more aesthetically pleasing finish and the simple method of attaching timber battens and feather lap boards, means that coverage is a quick and easy process. The timber cladding is easy to maintain and the precast reinforced L Walls are a long-lasting no maintenance backing wall.

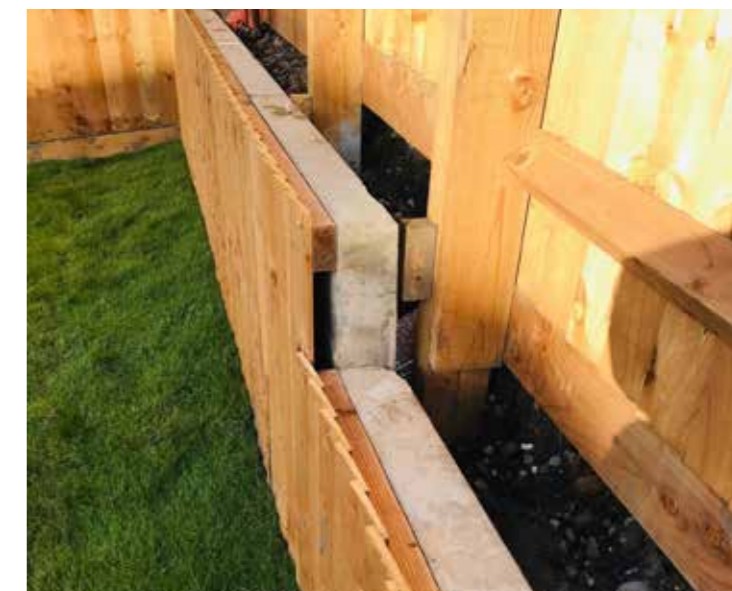

# THATCHERS CIDER L WALLS

Site: Myrtle Farm, Cheddar Somerset

Client: Thatchers Cider


Supplier: CRS Building Supplies Ltd

Products Supplied: Precast Concrete 2.5m L Walls

Thatchers, one of the UK's most famous cider manufacturers, has recently completed a 63,292 sq ft expansion at its site at Myrtle Farm, Cheddar Somerset. The new primary process plant and bonded warehouse will enable the company to uplift its apple cider production by a further 9 million litres to keep apace with growing demand.

The project has involved substantial earthworks on and around the site and the installation of an extensive site boundary structure. Following a review of retaining wall options, the in-house design and construction team at Thatchers opted for a precast concrete L Wall system. This method of walling using an off-site manufactured precast unit, is a simple and fast process, eliminating the need for shuttering, steel foundation formwork and the pouring of wet concrete.

FP McCann were approached by Somerset based CRS Building Supplies Ltd to provide a quotation for their 2.5 metres high wall unit, following which an order was placed for 151 individual sections, comprising 147 L Wall straight, two L Wall corner and two units with mitred edges.

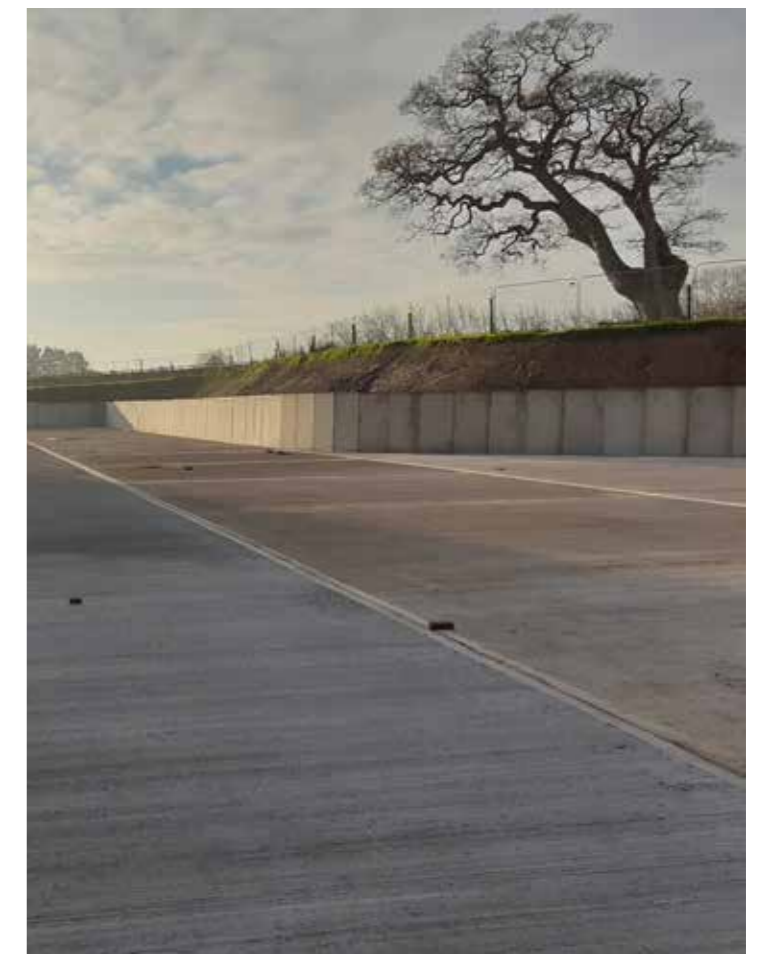

# MACCLESFIELD BRICK SLIP FACED L WALLS

Site: New Housing Development, Kings Park, Macclesfield, Cheshire

Client: David Wilson Homes (North West)


Installation Contractor: FP McCann

Products Supplied: 3.5m/3.0m High Precast Concrete 'L' Walls with 'Garnet Red' Brick Slip finish to outer face.

FP McCann has supplied and installed its first brick slip faced 'L' Wall earth retention system on a new housing scheme in Macclesfield, Cheshire. The 3.0 metres and 3.5 metres high precast concrete units are providing an important earth retaining barrier, whilst the attractive brick finish to the outer faces has been designed to complement a Grade II English Heritage listed building being converted into apartments as part of the housing project. Housing developer David Wilson Homes North West (DWH), is building 300 new homes on the former King's School campus in Fence Avenue.

With changes in elevation across the site, the project involves substantial earthworks. Following a review of their in-situ wall options and mindful of the impact on the historic "Fence House" building, the DWH in-house design and construction team in consultation with the FP McCann design and engineering team, opted for an off-site manufactured precast concrete 'L' Wall system with the brick slip face. This method of walling is a simple, fast process and eliminates the need for shuttering, steel foundation formwork and the pouring of wet concrete. An additional benefit of the 'L' Wall system is that no propping is required during construction.

FP McCann were approached by David Wilson Homes at a very early stage of the development to consider the aesthetic requirement of the wall itself. With the earth retaining wall facing the heritage listed "Fence House", it was important that a finish complemented the historic building. A Wienerberger 'Garnet Red' brick slip was the design choice for the outer faces of the 'L' Walls. On securing the order, the 10 no. 3.5 metres high and 2 no. 3.0 metres high wall units each 2.0 metres wide, were manufactured and delivered from the Company's Byley factory in Cheshire.

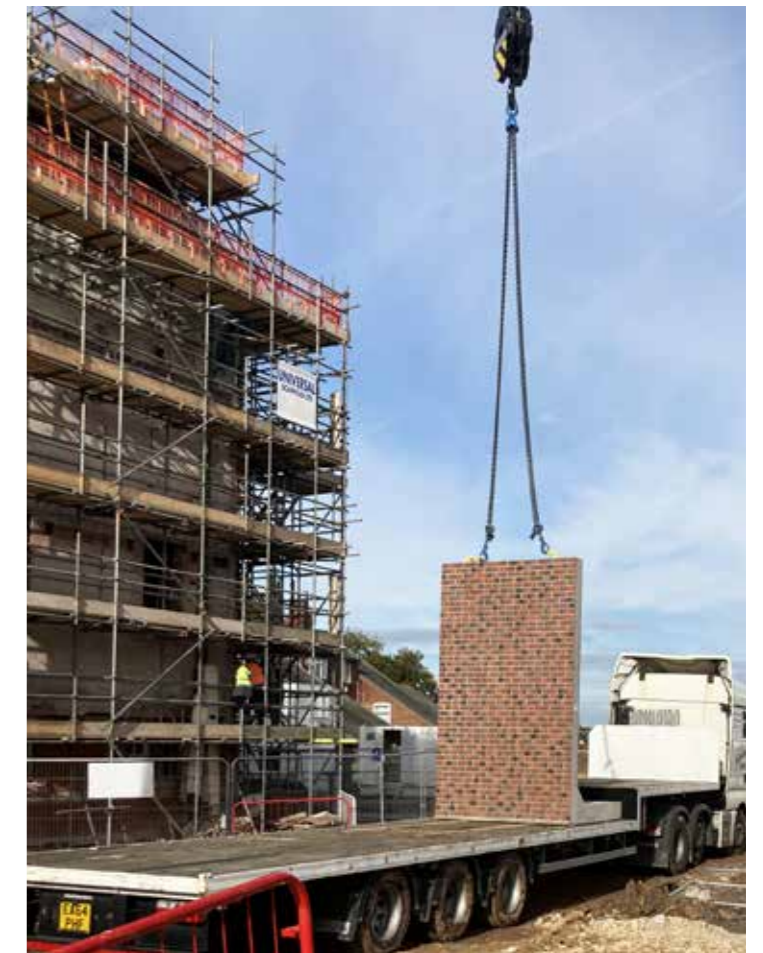

# TWYXCROSS ZOO CHIMPANZEE HABITAT PRECAST HORIZONTAL PANELS

Site: East Midland Zoological Society

Client: Twycross Zoo

Main Contractor: B&K Building Services

Products Supplied: Precast Concrete Walling Products

Work on a brand new chimpanzee habitat has begun at Twycross Zoo in Leicestershire. The Zoo's iconic species will move into a large immersive environment that encourages natural behaviours, at the same time as offering visitors a more engaging way of watching and learning about the chimpanzees.

Construction of the £2.6million facility commenced in March and FP McCann is playing a key role in both the supply of precast concrete walling products and has also secured a supply and installation contract, working on behalf of main contractor B&K Building Services.

The first phase of the contract involves the construction of a new three-storey steel-framed building which is being erected by Robinson Structures. The complex steel frame structure is being fitted with 133 different sized horizontal precast panels all 160mm thick and covering approximately 820m<sup>2</sup>. FP McCann's Lydney depot supplied the precast concrete horizontal wall panel system in June.



# VERTICAL CANTILEVER PANELS AT PORT OF LIVERPOOL

Site: Port of Liverpool

Client: Peel Ports Group

Main Contractor: McLaughlin & Harvey


Products Supplied: Precast Concrete Vertical Cantilever Panels

A new £15 million storage facility in the Port of Liverpool capable of handling millions of tonnes of bulk product a year has been completed, with FP McCann's precast concrete vertical cantilever panels forming an integral part of the building's structure.

The huge 282,000 sq. ft. warehouse commissioned by the Peel Ports Group, the main owner/operator at the docks, is part of a larger on-going development at the Port of Liverpool. UK and Ireland civil engineering and building contractor McLaughlin & Harvey secured the design and build of the warehouse. At approximately 375 metres long and 70 metres wide, the building is divided into three separate storage units.

Integral to the building design is the ability of the internal walls to transfer the mass loading from the stored material through to the floor. A number of design options were considered, however, the engineering team at McLaughlin & Harvey, in partnership with design consultants Corstorphine & Wright Architects and FP McCann engineers specified a 160mm thick vertical precast concrete cantilever panel system with an effective height of 3 metres.

The 27 week contract was completed in September with some 850 precast walling units supplied from FP McCann's Lydney factory weighing a total of 1,536 tonnes. These form over a kilometre of internal structural walling. The majority of the vertical cantilever panels are 1500mm wide, with an additional number of narrower 1000mm units and sections with flat and notched edges for other specific design requirements, such as door openings and 90 degree corners.

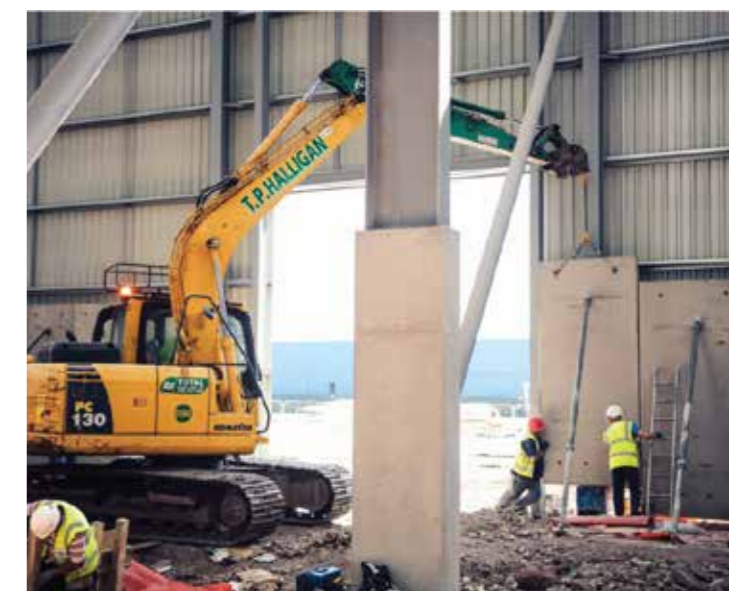



**GRANTHAM  
OFFICE:**

Summit House  
Alma Park Road  
Grantham Lincolnshire  
NG31 9SP  
**T** 01476 562277  
sales@fpmccann.co.uk

**LYDNEY  
OFFICE:**

Lydney Industrial Estate  
Harbour Road Lydney  
Gloucestershire  
GL15 4EJ  
**T** 01594 847500  
sales@fpmccann.co.uk

**MAGHERAFELT  
OFFICE:**

16-18 Quarry Road  
Knockloughrim  
Magherafelt  
BT45 8NR  
**T** 028 7954 9026  
sales@fpmccann.co.uk

**UDDINGSTON  
OFFICE:**

New Edinburgh Road  
Uddingston Glasgow  
Lanarkshire  
G71 6NE  
**T** 01698 803300  
sales@fpmccann.co.uk

## WALLING

Grantham 01476 562277 Lydney 01594 847500 Uddingston 01698 803 300 (Scotland)

### AGRICULTURE

Lydney 01594 847500 Grantham 01476 562277

### ARCHITECTURAL PRECAST

Byley 01606 843500 Grantham 01476 562277 Littleport 01353 861416

### BOX CULVERTS

Weston Underwood 01335 361269

### BUILDING PRODUCTS

Cadeby 01455 290780

### DOCK LEVELLER PITS

Weston Underwood 01335 361269

### DRAINAGE

Ellistown 01530 240000 (England/Wales) Magherafelt 028 7954 9026 (Scotland)

### FENCING

Cadeby 01455 290780

### FILTER BED SYSTEMS

Littleport 01353 861416

### FLOORING

Weston Underwood 01335 361269 Uddingston 01698 803300

### POWER & INFRASTRUCTURE

Littleport 01353 861416

### RAIL

Littleport 01353 861416

### SPECIALIST PRECAST

Littleport 01353 861416

### STRUCTURAL PRECAST

Byley 01606 843500 Grantham 01476 562277 Littleport 01353 861416

### TANKS & CHAMBERS

Littleport 01353 861416

### TUNNELS & SHAFTS

Cadeby 01455 290780

**FPMCCANN.CO.UK**