

CONCRETE ROOF TILES

V3.0



The UK's largest manufacturer and supplier of precast concrete solutions.

CONTENTS

Introduction	03
Roof Tiles - Round Top	04
Roof Tiles - Square Top	05
Roof Tiles - Double Roman	06
Roof Tiles - Duo Thin Flat	07
Roof Tiles - Thin Flat	08
Roof Tiles - SL8	09
Roof Tiles - Gemini	10
Roof Tiles - Centurion	11
Roof Tiles - V2	12
Roof Tiles - Senator	13
Roof Tiles - Plain	14
Roof Tiles - Minislate	15
Ridge Tiles - Multi-Ridge & Hip End	16
Ridge Tiles - Half & Third Round	17
Additional Concrete Fittings	18
Efflorescence & Technology	18
Solar Roof Tiles	19
Accessories	20
Roofing Case Study	26
Our Factory Locations	27

INTRODUCTION

FP McCann is the UK's largest manufacturer and supplier of precast concrete solutions. We are committed to high quality, cost-effective and sustainable solutions tailored to meet clients' requirements. Concrete Roof Tiles is the latest division to join our extensive range.

From our fourteen UK manufacturing facilities, FP McCann offers solutions that include architectural and structural solutions, rooms, flooring, fencing,

walling, shafts, tunnels, drainage, rail, power and agricultural products. FP McCann has worked on a large range of Design for Manufacture and Assembly (DfMA) projects across the UK. Our in-house Digital Engineering capability has grown in line with government and client expectations.


Our new high quality, machine produced Concrete Roof Tiles are available in a variety of profiles and colour options.



ROUND TOP PRECAST CONCRETE TILE



Shown here in Terracotta.

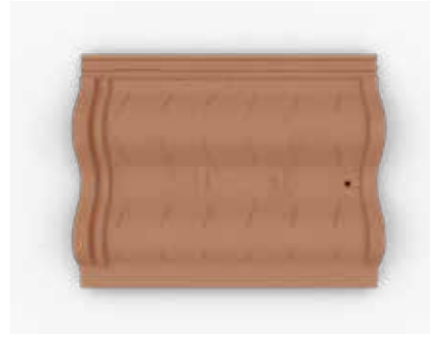

AVAILABLE IN



DIMENSIONS	
Size	420mm x 334mm
Thickness	26mm
Weight	4.5kg
Nail Size	70mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	75mm headlap - 47kg/m ² 100mm headlap - 51kg/m ²
Covering Capacity	75mm headlap - 9.8 tiles/m ² 100mm headlap - 10.6 tiles/m ²
Cover Width	305mm
Minimum Headlap	75mm
Minimum Pitch	75mm headlap - 17.5° 100mm headlap - 15°
Maximum Gauge	345mm
DELIVERY DETAILS	
Tiles per Band	35
Tiles per Pallet	210
Weight of Pallet	960kg

*Thickness references Leading-Edge thickness only

PRECAST CONCRETE TILE SQUARE TOP



Shown here in Brown.



DIMENSIONS	
Size	420mm x 330mm
Thickness	25mm
Weight	4.6kg
Nail Size	65mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	100mm headlap - 49kg/m ² 75mm headlap - 45kg/m ²
Covering Capacity	100mm headlap - 10.5 tiles/m ² 75mm headlap - 9.8 tiles/m ²
Cover Width	297mm
Minimum Headlap	75mm above 25°
Minimum Pitch	100mm headlap - 22.5° 75mm headlap - 25°
Maximum Gauge	345mm
DELIVERY DETAILS	
Tiles per Band	38
Tiles per Pallet	228
Weight of Pallet	995kg

*Thickness references Leading-Edge thickness only

AVAILABLE IN



DOUBLE ROMAN PRECAST CONCRETE TILE



Shown here in Rustic Red.



AVAILABLE IN



DIMENSIONS	
Size	420mm x 330mm
Thickness	28mm
Weight	4.6kg
Nail Size	65mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	75mm headlap - 45kg/m ² 100mm headlap - 49kg/m ²
Covering Capacity	75mm headlap - 9.8 tiles/m ² 100mm headlap - 10.5 tiles/m ²
Cover Width	300mm
Minimum Headlap	75mm
Minimum Pitch	100mm headlap - 17.5° 75mm headlap - 22.5°
Maximum Gauge	345mm
DELIVERY DETAILS	
Tiles per Band	35
Tiles per Pallet	210
Weight of Pallet	995kg

*Thickness references Leading-Edge thickness only

PRECAST CONCRETE TILE DUO THIN FLAT



Shown here in Black.




AVAILABLE IN



DIMENSIONS	
Size	420mm x 334mm
Thickness	21mm
Weight	4.7kg
Nail Size	40mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	75mm headlap - 45kg/m ² 100mm headlap - 49kg/m ²
Covering Capacity	75mm headlap - 9.7 tiles/m ² 100mm headlap - 10.5 tiles/m ²
Cover Width	305mm
Minimum Headlap	75mm (normal exposure)
Minimum Pitch	100mm headlap - 17.5° 75mm headlap - 22.5°
Maximum Gauge	345mm
DELIVERY DETAILS	
Tiles per Band	38
Tiles per Pallet	228
Weight of Pallet	1086kg

*Thickness references Leading-Edge thickness only

THIN FLAT PRECAST CONCRETE TILE

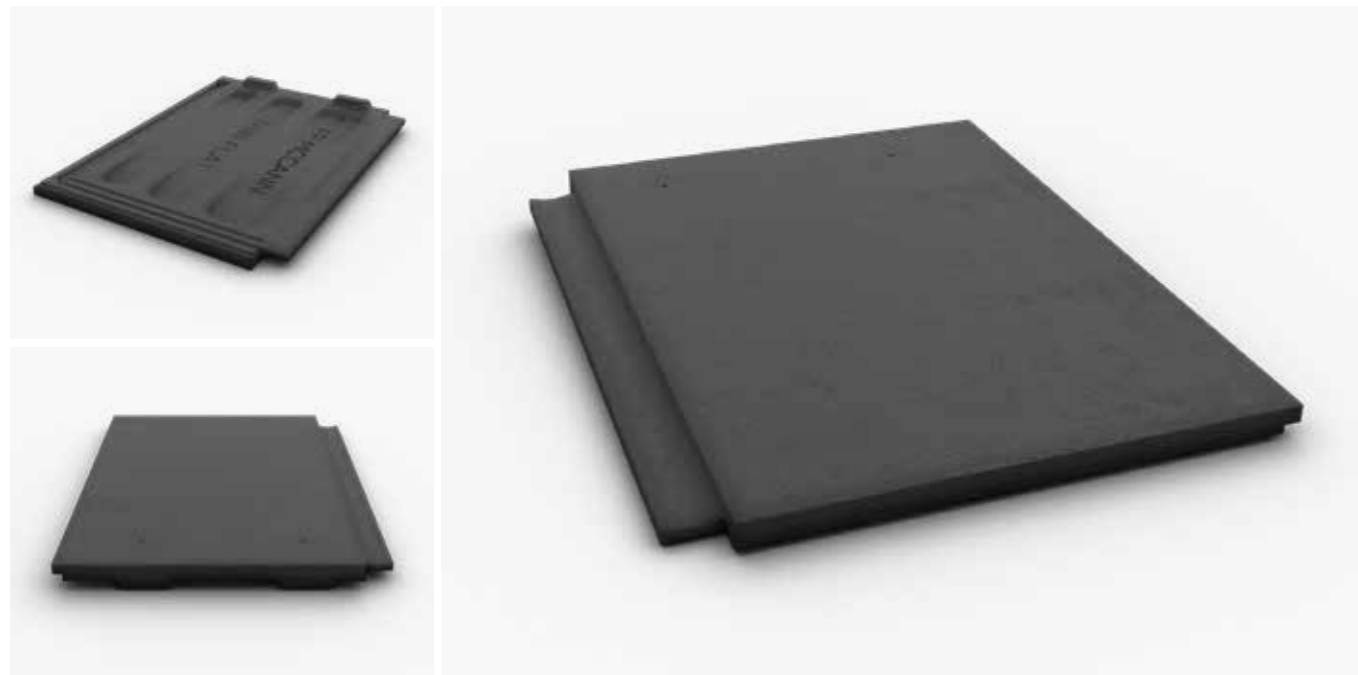

Shown here in Anthracite.



AVAILABLE IN



DIMENSIONS	
Size	420mm x 334mm
Thickness	21mm
Weight	4.7kg
Nail Size	40mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	75mm headlap - 45kg/m ² 100mm headlap - 49kg/m ²
Covering Capacity	75mm headlap - 9.7 tiles/m ² 100mm headlap - 10.5 tiles/m ²
Cover Width	305mm
Minimum Headlap	75mm (normal exposure)
Minimum Pitch	100mm headlap - 17.5° 75mm headlap - 22.5°
Maximum Gauge	345mm
DELIVERY DETAILS	
Tiles per Band	38
Tiles per Pallet	228
Weight of Pallet	1086kg

*Thickness references Leading-Edge thickness only

PRECAST CONCRETE TILE SL8




Shown here in Grey.

DIMENSIONS	
Size	420mm x 390mm
Thickness	15mm
Weight	5.4kg
Nail Size	45mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	100mm headlap - 46.62 kg/m ² 75mm headlap - 43.24 kg/m ²
Covering Capacity	100mm headlap - 8.63 tiles/m ² 75mm headlap - 8.01 tiles/m ²
Cover Width	362mm
Minimum Headlap	75mm (only for roof pitches of 22.5° and above)
Minimum Pitch	100mm headlap - 17.5° - 22.5° 75mm headlap - 22.5° - 75°
Maximum Gauge	17.5° - 22.5° - 320mm. 22.5° and above - 354mm max - 320mm min
DELIVERY DETAILS	
Tiles per Band	36
Tiles per Pallet	216
Weight of Pallet	1180kg

*Thickness references Leading-Edge thickness only



AVAILABLE IN

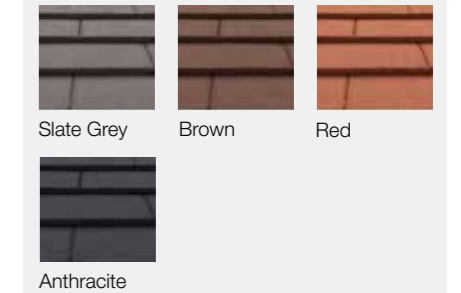

GEMINI PRECAST CONCRETE TILE



AVAILABLE IN



Grey Red Brown Sunrise Blend Mixed Russet Anthracite



Shown here in Red.

DIMENSIONS	
Size	270mm x 337mm
Thickness	15mm
Weight	2.85kg
Nail Size	45mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	80mm/95mm headlap - 47.47/51.54 kg/m ² 75mm/95mm headlap - 46.25/51.54 kg/m ²
Covering Capacity	80mm/95mm headlap - 16.66/18.08 tiles/m ² 75mm/95mm headlap - 16.23/18.08 tiles/m ²
Cover Width	316mm
Minimum Headlap	75mm (only for roof pitches of 30° and above)
Minimum Pitch	80mm/95mm headlap - 22.5° - 29.5° 75mm/95mm headlap - 30° - 75°
Maximum Gauge	22.5° - 29.5° - 190mm max - 175mm min 30° & above - 195mm max - 175mm min
DELIVERY DETAILS	
Tiles per Band	7
Tiles per Pallet	336
Weight of Pallet	960kg

*Thickness references Leading-Edge thickness only

PRECAST CONCRETE TILE CENTURION




Shown here in Brown.

DIMENSIONS	
Size	385mm x 230mm
Thickness	26mm
Weight	2.9kg
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	100mm headlap - 50.88 kg/m ² 110mm headlap - 52.73 kg/m ²
Covering Capacity	100mm headlap - 17.5 tiles/m ² 110mm headlap - 18.18 tiles/m ²
Cover Width	200mm
Minimum Headlap	100mm (normal exposure)
Minimum Pitch	100mm/110mm headlap - 10° - 12.5° 100mm/110mm headlap - 12.6° - 44°
Maximum Gauge	285mm max - 275mm min
DELIVERY DETAILS	
Tiles per Band	6
Tiles per Pallet	378
Weight of Pallet	1040kg

*Thickness references Leading-Edge thickness only



AVAILABLE IN

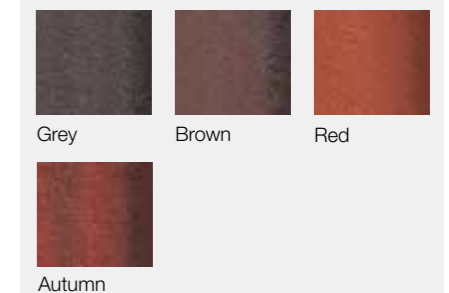

Grey Brown Red Autumn



Shown here in Autumn.



AVAILABLE IN



DIMENSIONS	
Size	385mm x 230mm
Thickness	26mm
Weight	2.9kg
Nail Size	50mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	75mm headlap - 47.58 kg/m ² 100mm headlap - 51.75 kg/m ²
Covering Capacity	75mm headlap - 16.13 tiles/m ² 100mm headlap - 17.54 tiles/m ²
Cover Width	200mm
Minimum Headlap	75mm (normal exposure)
Minimum Pitch	75mm/100mm headlap - 17.5° - 70°
Maximum Gauge	310mm max - 285mm min
DELIVERY DETAILS	
Tiles per Band	6
Tiles per Pallet	378
Weight of Pallet	1110kg

*Thickness references Leading-Edge thickness only




Shown here in Autumn.




DIMENSIONS	
Size	385mm x 230mm
Thickness	26mm
Weight	2.9kg
Nail Size	40mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)
WEIGHTS & COVERAGE	
Weight of Tiling	75mm headlap - 46.77 kg/m ² 110mm headlap - 52.73 kg/m ²
Covering Capacity	75mm headlap - 16.13 tiles/m ² 110mm headlap - 18.18 tiles/m ²
Cover Width	200mm
Minimum Headlap	75mm (normal exposure)
Minimum Pitch	75mm/110mm headlap - 22.5° - 70°
Maximum Gauge	310mm max - 275mm min
DELIVERY DETAILS	
Tiles per Band	6
Tiles per Pallet	378
Weight of Pallet	1040kg

*Thickness references Leading-Edge thickness only

AVAILABLE IN

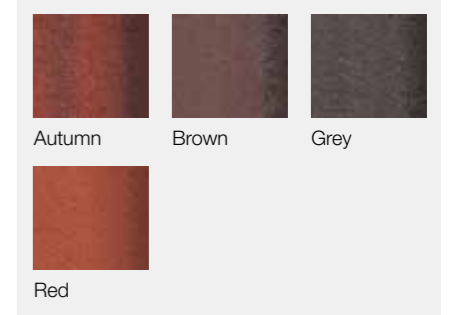

PLAIN TILE PRECAST CONCRETE TILE

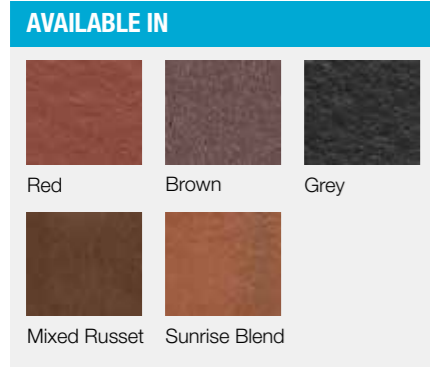

Shown here in Red.

VERTICAL CLADDING

DIMENSIONS	
Size	268mm x 165mm
Weight	1.25kg
Nail Size	40mm x 3mm Aluminium Alloy
WEIGHTS & COVERAGE	
Cover Width	165mm
Minimum Headlap	35mm (normal exposure)

DELIVERY DETAILS	
Tiles per Band	10
Tiles per Pallet	720
Weight of Pallet	880kg

We are able to offer a range of plain tile fittings, including:


- 90° external angle (LH & RH)
- 135° external angle (LH & RH)
- Plain tile & half
- Eave & top tile
- Beavertail tile
- Beavertail tile & half (LH & RH)
- Plain tile bonnet hip

*Thickness references Leading-Edge thickness only

PRECAST CONCRETE TILE **MINISLATE**



Shown here in Grey.

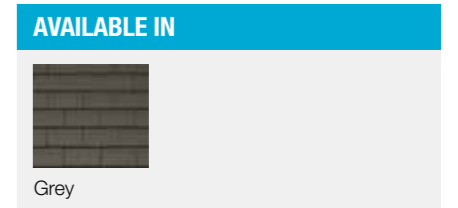


DIMENSIONS	
Size	270mm x 337mm
Thickness	15mm
Weight	2.85kg
Nail Size	45mm x 3.35mm Aluminium Alloy
Batten Size	50 x 25mm (rafters not exceeding 600mm c/c)

WEIGHTS & COVERAGE	
Weight of Tiling	80mm/95mm headlap - 47.47/51.54 kg/m ² 75mm/95mm headlap - 46.25/51.54 kg/m ²
Covering Capacity	80mm/95mm headlap - 16.16/18.08 tiles/m ² 75mm/95mm headlap - 16.23/18.08 tiles/m ²
Cover Width	316mm
Minimum Headlap	75mm (only for roof pitches of 30° and above)
Minimum Pitch	80mm/95mm headlap - 22.5° - 29.5° 75mm/95mm headlap - 30° - 70°
Maximum Gauge	22.5° - 29.5° - 190mm max - 175mm min 30° and above 195mm max - 175mm min

DELIVERY DETAILS	
Tiles per Band	7
Tiles per Pallet	336
Weight of Pallet	960kg

*Thickness references Leading-Edge thickness only

ANGLE RIDGE PRECAST CONCRETE TILE

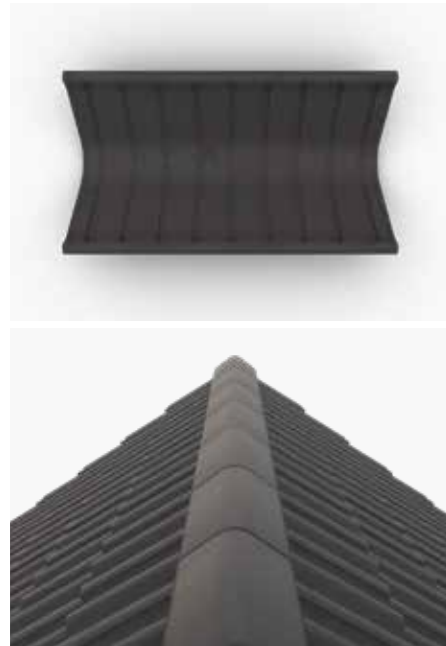

Shown here in Anthracite.

AVAILABLE IN



MULTI-RIDGE DIMENSIONS

Length	457mm	Maximum Roof Pitch	45°
Width	250mm	Tiles per Band	35
Height	80mm	Tiles per Pallet	140
Weight	5kg	Weight of Pallet	715kg

UNI ANGLE DIMENSIONS

Length	450mm	Height	115mm
Width	250mm	Weight	6.4kg

Colours:			
Grey	Red	Autumn	Brindle
Brown	Anthracite		



Available in nail-hole and non nail-hole



UNI ANGLE DIMENSIONS

Length	450mm	Height	115mm
Width	250mm	Weight	6.4kg

Colours:			
Grey	Red	Autumn	Brindle
Brown	Anthracite		

ROOF ACCESSORIES CONCRETE TILE FITTINGS



HALF ROUND DIMENSIONS

Length	450/457mm	Height	100mm
Width	250mm	Weight	5.4kg

Colours:

Grey	Rustic Red	Autumn	Black
Brown	Anthracite	Brindle	Terracotta
Red			



Available in Uni Angle profile

THIRD ROUND DIMENSIONS

Length	450mm	Height	85mm
Width	250mm	Weight	4.7kg

Colours:

Grey	Red	Autumn	Brindle
Brown	Anthracite		



Available in nail-hole only

Also available in Uni angle profile

HALF ROUND BLOCK END DIMENSIONS

Length	450mm	Height	230mm
Width	250mm	Weight	6.65kg

Colours:

Grey	Red	Autumn	Brindle
Brown	Anthracite		



Available in nail-hole only

Also available in Uni angle profile

THIRD ROUND HIP BLOCK END DIMENSIONS

Length	450mm	Height	85mm
Width	250mm	Weight	4.7kg

Colours:

Grey	Red	Autumn	Brindle
Brown	Anthracite		



Multi Ridge Block Ends also available

HIP END DIMENSIONS

Length	510mm	Height	130mm
Width	260mm	Weight	6.4kg

Colours:

Brown	Anthracite	Black	Terracotta
Rustic Red			

ADDITIONAL CONCRETE FITTINGS



HALF ROUND BABY RIDGE DIMENSIONS	
Length	450mm
Width	255mm
Height	350mm

MONO RIDGE DIMENSIONS	
Length	450mm
Width	255mm
Height	350mm

Available in LH & RH Block Ends

SCROLL FINIAL HALF ROUND BLOCK END RIDGE DIMENSIONS	
Length	450mm
Width	255mm
Height	350mm

Also available as a Non-Block End Version

WHAT IS EFFLORESCENCE AND HOW DO WE TREAT IT?

Efflorescence is a natural result of the reaction between cement and water. The calcium hydroxide 'lime' is a product of this reaction, which rises to the surface of the tile. It cannot be seen when wet but when the tile is dry a chalky, white residue can be seen.

The occurrence of efflorescence on concrete roof tiles is erratic and unpredictable, but weather conditions seem to be a significant factor.

Efflorescence forms more readily when the concrete tile becomes wet and dries slowly, and therefore, occurs more often during winter.

It is generally only likely to occur in the early life of the product, so materials installed for a year or more without experiencing efflorescence are unlikely to be affected in the future.

FP McCann apply a water-based acrylic sealant to their concrete roof tiles to suppress the lime and prevent efflorescence.

Further expansion at the fully automated Cadeby factory will shortly mean the introduction of additional tile profiles. All FP McCann concrete roof tiles and accessories are of the highest standard and are covered by a 15 year guarantee.



ROOF TILE SOLAR



SolarTyle and FP McCann have partnered to deliver a complete integrated solar roof solution, combining FP McCann's Thin Flat roof tile range with SolarTyle's innovative in-roof solar technology.

Aesthetics & Design

- In-roof solar tiles that sit flush with FP McCann's Thin Flat tiles and follow the natural contours of a tiled roof
- Exclusive colour-matched tiles for SolarTyle's anthracite and red panels
- No visible brackets or rails, maintaining the clean roofline



Performance & Technology

- 95W integrated modules with advanced IBC (Interdigitated Back Contact) technology
- Smaller format panels allow design flexibility and higher potential yields
- Anti-reflective tempered glass and low power degradation
- MCS certified and fire rated

Installation & Availability

- Rapid installation process using FP McCann's compatible tile system
- Modules assembled in the UK for the UK housing market
- Full system availability: solar tiles, matching roof accessories, plus battery storage, inverters and EV chargers for complete energy solutions



Guarantee & Support

- Supplied as a full roof system with FP McCann tiles and accessories
- Backed by a 15-year system guarantee

* SolarTyle is only compatible with FP McCann Thin Flat Concrete Roof Tile.

EASY-TRIM ROOFING PRODUCTS NOW PART OF FP MCCANN

FP McCann has officially acquired Easy-Trim Roofing and Construction Products Ltd, a leading UK manufacturer of high-quality roofing accessories. This strategic partnership is a significant step in our mission to provide you, our valued customers, with the most comprehensive and convenient service in the industry.



DRY FIX SYSTEMS ROOF ACCESSORIES

FP MCCANN & EASY-TRIM RIDGE KIT 6M



KIT INCLUDES

- Ridge Roll 6m Ventilated or Unventilated
- Unions x13
- Batten Straps x10
- Centre Clips x13
- Outer Clips x26
- Screws x13
- Nails x45 (approx)

Also available in 3m & 10m

HIP ACCESSORY KIT



SPECIFICATION

- Hip Tray Length 1200mm
- Hip Coverage 6m
- Hip Trays 5
- Large Hip Fixing Clips 20
- Small Hip Fixing Clips 20
- Ratchet Clips 26

DRY VERGE SYSTEM



Dry Verge Unit



(Multi) Ridge End Cap



Half Round & Angled Ridge Starter & End Caps with Blanking Plates

ROOF ACCESSORIES VENTILATION PRODUCTS

EAVES VENT SYSTEM



6m Roll Out Rafter (Various Sizes)



Felt Support Tray



Over Fascia Ventilator 10mm or 25mm

MEMBRANES



Breather - Easy-Trim112

Weight: 112gsm


Wind Suitability: Zones 1-5



Breather - Easy-Trim132

Weight: 132gsm


Wind Suitability: Zones 1-5

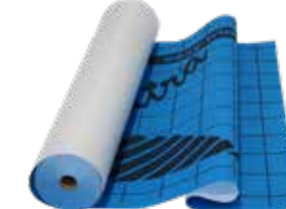

Breather - Easy-Trim140

Weight: 140gsm

Wind Suitability: Zones 1-5

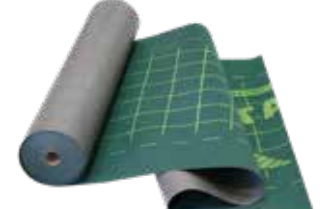

Breather - Easy-Trim162


Weight: 162gsm

Wind Suitability: Zones 1-5

TILE FIXINGS & CLIPS



Verge Clip (Gemini, Minislate, Centurion and Senator)



Perimeter Clip - Available in Grey and Rustic Red



Centurion Tile Clip



SL8 Clip



Gemini Tile Clip



Universal Eave Clip



Sidelock Clip Thin Flat



Sidelock Clip Round Top



Hip Clip

VERGE SYSTEMS ROOF ACCESSORIES

GEMINI & MINISLATE VERGE SYSTEM

RH & LH Verge Packs:

Gemini/Minislate verge units (either LH or RH) x15
 38mm coloured stainless steel screws x15
 Batten end spacer brackets x15
 20mm nails x30
 Foam block end x1
 Available in Grey, Brown, Red and Rustic



LH Continuation Verge in Rustic



RH Continuation Verge in Rustic

SL8 VERGE SYSTEM

Verge Starter/Ridge End Packs:

SL8 LH Verge Starter Unit x1
 SL8 RH Verge Starter Unit x1
 Top Foam Filler x1
 20mm Nails x4
 Available in Grey and Rustic

RH & LH Verge Packs:
 SL8 (LH or RH) Verge Units x10
 Perimeter Clips x10
 20mm Nails x20
 Available in Grey and Rustic



LH Starter Verge/Ridge End in Rustic



RH Starter Verge/Ridge End in Grey

HIP PACK ASSEMBLY ROOF ACCESSORIES

SL8, GEMINI & MINISLATE HIP PACK 6M

Hip Carrier Trays with 25mm foams x14
 Screws, rubber washers and grommets x28



CENTURION, SENATOR & V2 HIP PACK 6M

Hip Carrier Trays with 60mm foams x14
 Screws, rubber washers and grommets x28



ROOF ACCESSORIES VENT TILES

VENT PACKS

Soil Vent Pack components:
 Vent Tile x1
 Felt Weir x1
 Flexi Pipe (including jubilee clips) x1



Air Vent Pack components:
 Vent Tile x1
 Felt Weir x1



Available as 100mm or 160mm, depending on the vent tile ordered


SL8 VENT TILE

Designed to complement the FP McCann SL8 concrete roof tile range. Free Vent Area 15320mm². Available in Brown, Grey and Red.

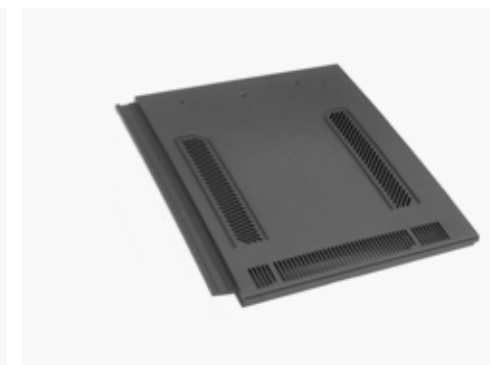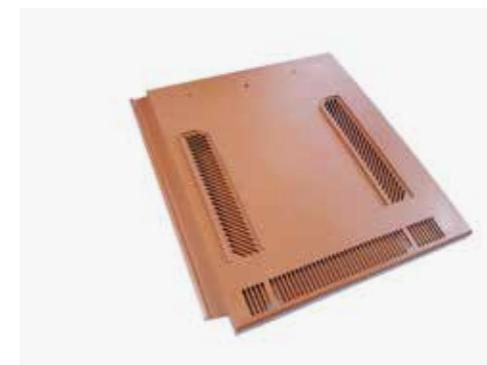

GEMINI & MINISLATE VENT TILE

Designed to complement the FP McCann Gemini and Minislate concrete roof tile range. Free Vent Area 9416mm². Available in Brown, Grey, Red and Rustic.

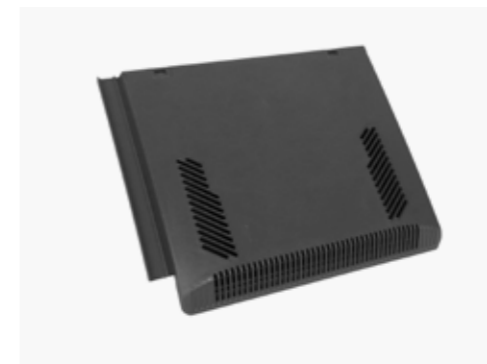

V2 VENT TILE

Designed to complement the FP McCann V2 concrete roof tile range. Free Vent Area 12600mm². Available in Brown, Grey, Red and Rustic.



VENTED RIDGE PACK ROOF ACCESSORIES

FLAT TILE VENTED RIDGE PACK 6M

- Pack Contains:
- Steel Ridge Batten Brackets x10
 - Top Fillers x40
 - Ridge Seals x13
 - Screws, rubber and S/S washers and grommets x28
 - 25mm Nails x40
- Available in Grey and Rustic



CENTURION & SENATOR RIDGE PACK 3M

- Pack Contains:
- Steel Ridge Batten Brackets x6
 - Top Fillers x30
 - Ridge Seals x7
 - Screws, rubber and S/S washers and grommets x14
 - 25mm Nails x24
- Available in Grey and Rustic



V2 VENTED RIDGE PACK 3M

- Pack Contains:
- Steel Ridge Batten Brackets x6
 - Top Fillers x30
 - Ridge Seals x7
 - Screws, rubber and S/S washers and grommets x14
 - 25mm Nails x24
- Available in Grey and Rustic



ROOF ACCESSORIES TILE BEDDING MORTAR

ROOF TILE BEDDING MORTAR

FP McCann Roof Tile Bedding Mortar is a blend of carefully selected sands, cements and additives manufactured in accordance with EN998-2. Produced in a factory-controlled environment providing consistently high levels of quality, it is a factory produced prescribed 1:3 cement:sand mix with plasticiser. Roof Tile Bedding Mortar is supplied ready for use packaged in a weather resistant bag. It is chloride-free and suitable for use with all standard concrete and clay roof tiles and ridge tiles. Available in Natural, Black and Red colours.



CASE STUDY CONCRETE ROOF TILES

FP MCCANN THIN FLAT AND MULTI RIDGE ROOF TILES INSTALLED ON SOMERSET HOUSING DEVELOPMENT

FP McCann is supplying its thin leading edge interlocking concrete roof tiles branded "Thin Flat" to a new housing development in Somerton near Yeovil, Somerset. The "Somerton Mead" site is a 69 plot collection of 2, 3 and 4 bedroom houses by national builder Bloor Homes. Bloor Homes South West division completed phase one of the Somerton Mead housing development last year. With the addition of 69 homes in phase 2 and 3, the site will comprise 130 homes between Bancombe Road and Bradley Hill Lane in the north-west of the town.

To complement the properties many of which consist of buff reconstituted stone walls to mimic the natural Somerset limestone, FP McCann Brown and Terracotta Thin Flat concrete roof and Multi Ridge tiles have been specified by Bloor Homes and installed by Taunton based roofing company, Deelis Roofing Ltd. Some 35,000 Thin Flat tiles together with 2,500 Multi Ridge tiles will be required to complete the 69 houses.

The FP McCann concrete roof and ridge tiles have been supplied from the company's new ultra-modern £30 million tile factory in Cadeby near Nuneaton, Warwickshire. FP McCann's stylish looking low-profile Thin Flat tile is also available in Black, Anthracite and Rustic Red and features a smooth, non-textured finish and straight cut edge.

Commenting on the Thin Flat and Multi Ridge roof tile installation, Keenan Hanratty, Site Manager for Bloor Homes says, ***"The low-profile brown and terracotta concrete tiles give the roofs on the new houses a distinctive stand-out appearance as to our design specification. The durable tiles are easy to fix with minimum breakage recorded. We will certainly consider using FP McCann's roof tile range on any future home building schemes."***

Further expansion at the fully automated Cadeby factory will shortly mean the introduction of additional tile profiles. All FP McCann concrete roof tiles and accessories are of the highest standard and are covered by a 15 year Guarantee.



FACTORY LOCATIONS

KEY

- Manufacturing Facilities
- ▲ Quarries/Manufacturing Locations



GET IN TOUCH

Scan the QR code for additional contact information and for your regional sales representative, or visit our website: fpmccann.co.uk/uk/concrete-roof-tiles/



CONCRETE ROOF TILES

PRODUCT RANGE & ACCESSORIES

roofing@fpmccann.co.uk | Cadeby Office 01455 290780 | www.fpmccann.co.uk

FP McCann Cadeby Office | Brascote Lane | Cadeby | Nuneaton | Leicestershire | CV13 0BB | UK